

**ALZMETALL**  
we drive productivity

# iTRONIC DRILLING MACHINES

## CATALOG No. 73 i valid from 01.03.2026



## COMPANY PROFILE



ALZMETALL Deutschland



ALZMETALL Machine Tools (Taicang, China)

**ALZMETALL** is a company with international reputation and worldwide activities. We have been the leader in the technology of drilling, milling and casting for more than seven decades. Our products have proven themselves a thousandfold in the general machine construction sector, in the aerospace industry, the automotive industry, in tooling and mold making as well as in the broad scene of medium-sized manufacturing companies.

We rely on the experience of more than 230,000 machines delivered. We focus on Precision, Performance and Quality of all of our products.

With our proper in-house ALZMETALL foundry, we process grey-cast iron and spheroidal grey-cast iron, not only for our own machines but also for machine tool builders in Germany and abroad.

In our open company culture, that drives innovation and results, we will always use cutting-edge technology as an added economic value for our customers.

With the development of the GS series we created and developed highly dynamic and extremely rigid machining centers according to our motto „**We drive productivity**“.

Since 2016 you will also find ALZMETALL as a sales and service company in China.

ALZMETALL Machine Tools (Taicang) Co., Ltd.  
Dong Ting Building, Room 1612,  
No 319, Middle Zheng He Road,  
215400 Taicang, Jiangsu province

## MACHINING CENTERS

ALZMETALL develops and manufactures CNC machining centers for 3-and 5-axis applications with torque-drive technology enabling 5-axis simultaneous milling and turning.



## DRILLING MACHINES

ALZMETALL is the market leader for drilling machines. This leading position has grown continuously since 1947, when the company began developing, producing and distributing industrial drilling machines in mass production, two years after it was founded. Particularly impressive is the large number of drilling machines that have been manufactured. Totalling over 210.000, they convince with their performance capabilities and leading technology.



*Flexible production cell with pallet station.  
ALZMETALL is using their proper machining centers.*



*Assembly line for drilling machines*

## WHAT MAKES ALZMETALL DRILLING MACHINES STAND OUT?



### Advantage for our customers

- ★ Extensive know-how in the field of casting technologies, derived from our own foundry, enables the unique column diameter design of our drilling machines (photo).
  - » Minimum opening bounce on the impact of drilling forces
  - » Verticality of the tool axis remains within approved DIN values
- ★ The unique mechanical connection of the drilling machine-head and the column guarantees the right angularity to the drilling table to the highest quality.
- ★ Continuous innovation and design transfer as a manufacturer of machining centers and special drilling and milling machines guarantees the most advanced drilling machines worldwide.

## The standard in drilling includes:

- ★ **TFT - LCD-Display with Touch Function**
- ★ **Tapping function with all AX and AB Machines**
- ★ **Digital depth read-out with touch zero setting**
- ★ **Virtual depth scale in the display**
- ★ **Stepless Spindle Speed Setting**
- ★ **24 month Warranty**
- ★ **Exclusive Design**

## Contents

### iTRONIC DRILLING MACHINES DRILLING MACHINE VICE ALZ 220 OPTIONS

#### ALZTRONIC

Fast precise  
**TABLE DRILLING MACHINES**  
230 V for schools, trainees,  
laboratories, institutes and  
manufacture at a top entry-price.

#### ALZSTAR

The **START-UP-Range**  
for reduced budgets

#### AX

**TOP-QUALITY**  
drilling with complete options

#### AB

**TRENDSSETTERS**  
for high performance drilling.  
Unmatched and highly precise

#### ALZFLOW AB-FLOW

**ALZFLOW, AB-FLOW**  
flowdrilling, chipless drilling

#### RADIAL

**RADIAL**  
for large and heavy parts

#### RFT

**1-6 PRESETTED  
DRILLING STATIONS**

**Accessories**

**Special equipment**

**TFT Display with Touch Function**  
**Drilling machine vice ALZ 120/220**  
**Examples of options**

Integrated technology calculator,  
Drilling machine vice ALZ 120/220  
Combination table, precision depth adjuster  
and fixed stop, belt technology, coolant  
device A, tapping, training content

Page 6/7

**Bench Drilling Machines**  
ALZTRONIC i6/i9/i12/i14/i16

Drilling capacity 6/9/12/14/16 mm  
B 16 / Morse Taper 2

Page 8-11

**Bench and Column Drilling Machines**  
ALZSTAR 18-T/S, ALZSTAR 23/30/40 iTRONIC

Drilling capacity 18/23/30/40 mm  
Morse Taper 2 / 3 / 4

Page 12-19

**Bench and Column Drilling Machines**  
AX 2/3/3s/4 iTRONIC

Drilling capacity 23/40/55 mm  
Morse Taper 2/3/4

Page 20-25

**Column and Semi-Box Column Drilling Machines**  
AB 26/34/40 iTRONIC, AB 50/SV

Drilling capacity 30/40/50/60 mm  
Morse Taper 3/4

Page 26-31

**Column and Semi-Box Column Drilling Machines**  
ALZFLOW 30 iTRONIC/AB-FLOW 40 iTRONIC

Flowdrilling capacity 12/20 mm  
Morse Taper 3/4

Page 32-35

**Radial Drilling Machines**  
AB 30/R-1000, AB 30/R-1400

Drilling capacity 45/50 mm  
Morse Taper 4

Page 36

**Multi-Head Drills**  
RFT 20/1  
RFT 2 / RFT 3

Drilling capacity 23 – 55 mm  
Morse Taper 2 – 4

Page 38-41

(Sliding) cross tables, vices, drill chucks, adapters, ejectors, reducers


Page 42/43

for all drilling machines: foot switches, machine tables, special lacquer etc./configuration help

Page 44

## NEW IN THE RANGE – DRILLING MACHINE VICE ALZ 120/220



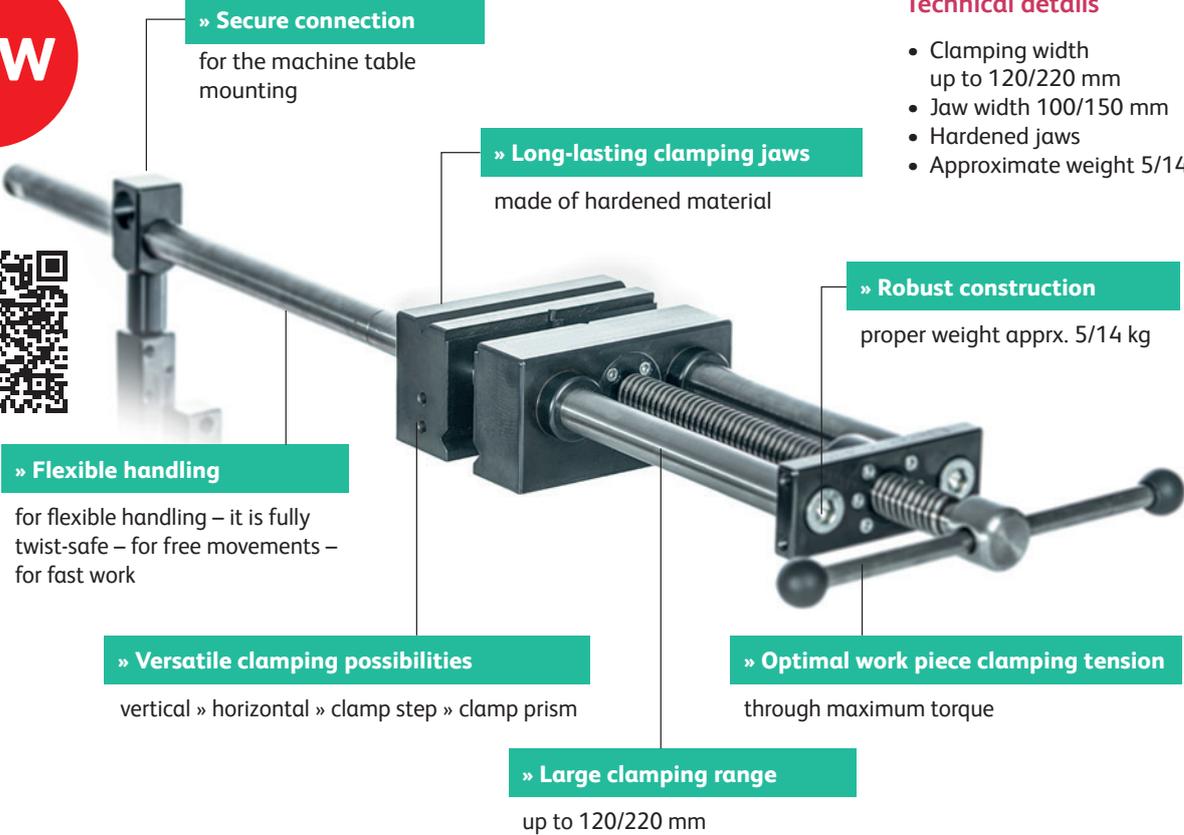

**Technical details**

- Clamping width up to 120/220 mm
- Jaw width 100/150 mm
- Hardened jaws
- Approximate weight 5/14 kg

**» Secure connection**  
for the machine table mounting

**» Long-lasting clamping jaws**  
made of hardened material

**» Robust construction**  
proper weight approx. 5/14 kg

**» Flexible handling**  
for flexible handling – it is fully twist-safe – for free movements – for fast work

**» Versatile clamping possibilities**  
vertical » horizontal » clamp step » clamp prism

**» Optimal work piece clamping tension**  
through maximum torque


**» Large clamping range**  
up to 120/220 mm

- » The ALZ 220 is suitable for all machines with a column diameter **starting** 115 mm.
- » Please contact ALZMETALL for more clamping possibilities

### OPTIONS



**Coolant supply-system A**  
The coolant supply-system A is integrated in the base of the drill press and fitted with coolant pump and motor, overload protection switch, valves and fittings (Not for HST versions).

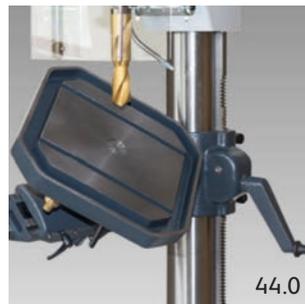

**Combined drilling table**  
The combined drilling table is particularly suitable for machining components, that need to be drilled at various angles.



**Micro drilling depth setting and fixed stop**  
The micro drilling depth setting provides quick and accurate drilling depth adjustments and/or drilling depth corrections.




**Tapping device**  
A Tapping Device is offering a much more efficient use of a drilling machine. It is enabling an automatic reversed rotation of the Spindle (CW or CCW) at a certain chosen depth. Whenever the quill is arriving back in its original position, the spindle is rotating right (CW) again. The thread depth can be set with the mechanical end stop, with the foot switch [Pos.20.5] or numerically in the Touch Display (only AB). The basic tapping device is standard in all AX and AB machines ( except for the AB 50).




**Belt technology**  
Stepless RPM speed setting through mechanical variators. This photo is showing the AB 40 iTRONIC, n=70-4000 mechanical variator in combination with a two-step belt gear box (powerful low Rpm speeds and high speed. Upto 4000 rpm)

*Any prices are not applying to retrofit orders (accessories, options, spare/wear parts) or any assembly/modification works.*

## iTRONIC DRILLING MACHINES WITH TFT - LCD-DISPLAY WITH TOUCH FUNCTION

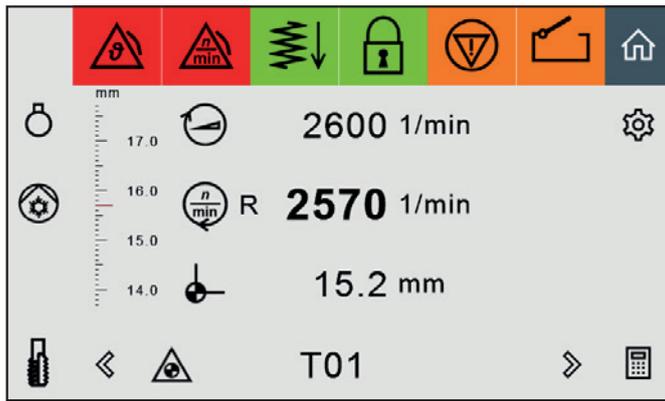

Main screen

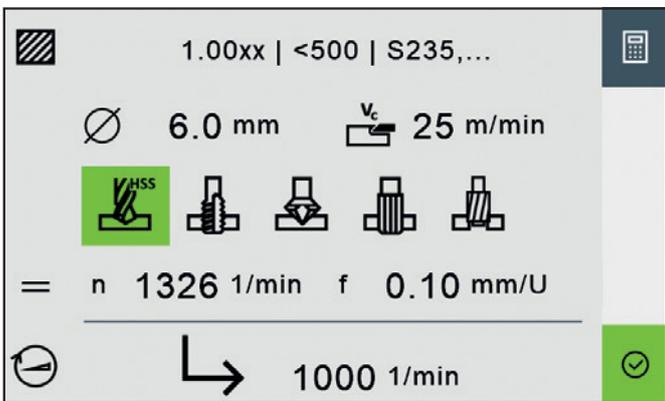


Technology calculator [option]

### Added value with new iTRONIC Drilling Machines, STANDARDS INCLUDED


- Multi-Touch Display 5" or 7" with scratch-resistant glass
- Clear digits and good readability
- Simple and uniform menu navigation with pictograms
- Manual setting of the RPM value – nominal value
- RPM read out – actual value
- Drill depth read out with zero-setting (drill start)
- Virtual depth scale with synchron zero-setting
- Status indicators and warnings (safety)
- Main switch, lockable
- Right and left turn under protective control
- Control tension 24 V
- Service informations
- Language switch: DE/EN/FR/ES/IT/NL/RU
- Spindle brake function – only with highspeed ALZTRONIC machines (safety)
- Automatic RPM control with AB 40 iTRONIC and AB-FLOW 40 iTRONIC
- Adjustable Display-Timeout

## TRAINING


### Training Contents




Drilling




Facing




Facing



Tapping



Reaming



Flow drilling



### Poster

The poster (PVC tarpaulin, size 150 x 100 cm, with aluminum hanging fixture) featuring a detailed representation of the machine components is ideal for apprentice workshops as well as for training and educational purposes

Price: 120,00 €

## BENCH DRILLING MACHINES WITH DRILL HEAD HEIGHT ADJUSTMENT

Drilling capacity 6/9/12 mm

Photo with options



	ALZTRONIC i6	ALZTRONIC i9	ALZTRONIC i12
<b>Drilling capacity steel E 335 (St 60)</b>	6 mm	9 mm	12 mm
<b>Tapping performance steel E 335 (St 60)</b>	M 6	M 8	M 10
<b>Drill chuck adapter (DIN 238)*</b>	B 16	B 16	B 16
<b>Z-travel of spindle</b>	40 mm	40 mm	40 mm
<b>Distance spindle to column</b>	200 mm	200 mm	200 mm
<b>Column diameter</b>	50 mm	50 mm	50 mm
<b>Machine table (intermediate)</b>	without	without	without
<b>Base plate, clamping area (width x depth)</b>	300 x 240 mm	300 x 240 mm	300 x 240 mm
<b>T-Slots, number x width x distance</b>	2 x 12 x 80 mm	2 x 12 x 80 mm	2 x 12 x 80 mm
<b>Distance spindle / base plate min. /max.</b>	110/250 mm	110/250 mm	110/250 mm
<b>Feed</b>	manual	manual	manual
<b>Drill head adjustment (trapezoid vice)</b>	wheel	wheel	wheel
<b>Height of the machine without options approx.</b>	670 mm	670 mm	670 mm
<b>Net weight approx.</b>	64 kg	64 kg	64 kg
<b>Drive System</b>	infinitely variable	infinitely variable	infinitely variable
<b>Motor</b>	<b>0,7 kW</b>	<b>0,7 kW</b>	<b>0,7 kW</b>
<b>Spindle Rpm range</b>	700-10000 rpm	390-6500 rpm	250-5000 rpm
<b>Price of the machine without options</b>	<b>4.175,00 €</b>	<b>2.667,00 €</b>	<b>3.394,00 €</b>

**Standard Equipment:**

5" TFT - LCD-MULTI-TOUCH Display:

Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**AC motor** 230 Volt, 50 Hz**Plug**, fully assembled, cable length 2 m**Stepless speed setting** by potentiometer**Push button for starting the Right turn (CW),****Push Button for starting the Left turn (CCW),****Push Button for Spindle off****(Spindle stop by brake function)****Spindle protection** electrically secured**Motor isolation class „F“ (155°C)****EMERGENCY-OFF switch**, self-locking**Main switch**, lockable**Control Tension 24 Volts****Protection Clas IP 54****Lacquer:** DD-structured signal white RAL 9003,

PANTONE 7545c, black

**Stable carton, width x depth x height:** approx. 800 x 600 x 1050 mm, weight net. approx. 10 kg**OPTIONS**

09.	<b>Table/Bench for ALZTRONIC</b> , w x d x h 700 x 600 x 840 mm, Net weight approx. 48 kg	<b>1.093,00 €</b>
12.	<b>LED machine light</b> , adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control function in the Touch Display	<b>348,00 €</b>
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	<b>276,00 €</b>
37.6	<b>Maximum Drill Depth Readout in the Touch Display</b> - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	<b>101,00 €</b>
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	<b>101,00 €</b>
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime</b> w/o reset. May be switched ON/OFF.	<b>101,00 €</b>
800481	<b>Quick action drill chuck SPIRO SK 10</b> , with B 16 inner bore*, clamping 0-10 mm, suitable for up to 10.000 Rpm and right – left rotation. (mainly for ALZTRONIC i6, i9 and i12)	<b>192,00 €</b>
800483	<b>Quick action drill chuck SPIRO SK 13S</b> with B 16 inner bore*, clamping 1-13 mm, suitable for up to 8.000 Rpm and right – left rotation. (mainly for ALZTRONIC i6, i9 and i12)	<b>208,00 €</b>
08.1	<b>Packing for the Table/Bench (Pos. 09.)</b> , W x D x H 1200 x 800 x 1300 mm, Packing weight approx. 16 kg	<b>51,00 €</b>

More Quick-Action drill chucks, tapers, adapters see Page 43 (for ALZTRONIC i14 and ALZTRONIC i16)

## BENCH DRILLING MACHINES WITH TABLE HEIGHT ADJUSTMENT

Drilling capacity 14/16 mm

Photo with options



	ALZTRONIC i14	ALZTRONIC i16
<b>Drilling capacity steel E 335 (St 60)</b>	14 mm	16 mm
Tapping performance steel E 335 (St 60)	M 10	M 12
Short spindle	MT 2	MT 2
Z-travel of spindle	80 mm	80 mm
Distance spindle to column	190 mm	190 mm
Column diameter	65 mm	65 mm
Machine table (intermediate), clamping area (width x depth)	300 x 240 mm	300 x 240 mm
T-Slots, number x width x distance	2 x 12 x 80 mm	2 x 12 x 80 mm
Distance spindle / table min. /max.	75/357 mm	75/357 mm
Base plate, clamping area (width x depth)	300 x 240 mm	300 x 240 mm
T-Slots, number x width x distance	2 x 12 x 80 mm	2 x 12 x 80 mm
Distance spindle / base plate min. /max.	437/437 mm	437/437 mm
Feed	manual	manual
Machine table (intermediate) Height adjustment	crank	crank
Height of the machine without options approx.	825 mm	825 mm
Net weight approx.	83 kg	83 kg
<b>Drive System</b>	infinitely variable	infinitely variable
<b>Motor</b>	<b>0,7 kW</b>	<b>0,7 kW</b>
Spindle Rpm range	230-4000 rpm	100-2000 rpm
<b>Price of the machine without options</b>	<b>3.680,00 €</b>	<b>4.070,00 €</b>

**Standard Equipment:**

5" TFT - LCD-MULTI-TOUCH Display:

Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**AC motor** 230 Volt, 50 Hz

**Plug**, fully assembled, cable length 2 m

**Stepless speed setting** by potentiometer

**Push button for starting the Right turn (CW),**

**Push Button for starting the Left turn (CCW),**

**Push Button for Spindle off**

**(Spindle stop by brake function)**

**Spindle protection** electrically secured

**EMERGENCY-OFF switch**, self-locking

**Motor isolation class „F“ (155°C)**

**Main switch**, lockable

**Control Tension 24 Volts**

**Protection Clas IP 54**

**Lacquer:** DD-structured signal white RAL 9003,

PANTONE 7545c, black

**Stable carton, width x depth x height:** approx. 800 x 600 x 1050 mm, weight net. approx. 10 kg

**OPTIONS**

09.	<b>Table/Bench for ALZTRONIC</b> , w x d x h 700 x 600 x 840 mm, Net weight approx. 48 kg	<b>1.093,00 €</b>
12.	<b>LED machine light</b> , adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control function in the Touch Display	<b>348,00 €</b>
20.6	<b>Tapping device.</b> Parameter setting in the TFT-LCD Touch Display. 4 tapping tools may be pre-setted.	<b>175,00 €</b>
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	<b>276,00 €</b>
37.6	<b>Maximum Drill Depth Readout in the Touch Display</b> - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	<b>101,00 €</b>
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	<b>101,00 €</b>
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime</b> w/o reset. May be switched ON/OFF.	<b>101,00 €</b>
08.1	<b>Packing for the Table/Bench (Pos. 09.)</b> , W x D x H 1200 x 800 x 1300 mm, Packing weight approx. 16 kg	<b>51,00 €</b>

More Quick-Action drill chucks, tapers, adapters see Page 43 (for ALZTRONIC i14 and ALZTRONIC i16)




## ALZTRONIC i14 and i16

### OPTION TAPPING DEVICE

Drilling capacity 14/16 mm  
Tapping performance M10/M12

Spindle MT 2  
Spindle Rpm range  
n =100 - 2000  
n =230 - 4000



## BENCH DRILLING MACHINES WITH TABLE HEIGHT ADJUSTMENT

Drilling capacity 18 mm

*Photo with options*



	<b>ALZSTAR 18-T/S</b>
<b>Drilling capacity steel E 335 (St 60)</b>	18 mm
<b>Tapping performance steel E 335 (St 60)</b>	M 12
<b>Tapping performance cast iron EN-GJL-200 (GG 20)</b>	M 14
Short spindle	MT 2
Z-travel of spindle	80 mm
Distance spindle to column	190 mm
Column diameter	65 mm
Table clamping area (width x depth)	300 x 240 mm
T-Slots, number x width x distance	2 x 12 x 80 mm
Distance spindle/table min./max.	75/357 mm
Table height adjustment	crank
Base plate, clamping area (width x depth)	300 x 240 mm
T-Slots, number x width x distance	2 x 12 x 80 mm
Distance spindle / base plate min. /max.	437/437 mm
Feed manual	manual
Height of the machine without options approx.	840 mm
Net weight approx.	110 kg
<b>Drive System</b>	infinitely variable
<b>Motor:</b> n = 750 / 1500 rpm	<b>0,37 / 0,55 kW</b>
Spindle Rpm range	225-4300 rpm
<b>Price of the machine without options</b>	<b>3.355,00 €</b>

## Standard Equipment

**Infinitely variable speed drive**, mechanical variator with lever  
**Spindle protection** electrically secured  
**Reverse switch** for tapping  
**Self-Locking Mushroom Button** for Emergency-Off  
**Main switch** with Overload Protection Switch lockable

**Motor isolation class „F“ (155°C)**  
**Cable** (w/o plug, 2 m)  
**Protection class IP 54**  
**Lacquer**: DD-structured signal white RAL 9003,  
 PANTONE 7545c, black

## OPTIONS

09.	Table/Bench for ALZSTAR 18-T/S, W x D x H 700 x 600 x 840 mm, Net weight approx. 48 kg	1.093,00 €
12.	LED machine light, adjustable angle, 230 V, IP 65	431,00 €
08.	Packaging for the ALZSTAR 18-T/S, disposable L x W x H ca. 800 x 600 x 1050 mm packing weight approx. 10 kg	35,00 €
08.1	Packing for the Table/Bench (Pos. 09.), W x D x H 1200 x 800 x 1300 mm, Packing weight approx. 16 kg	51,00 €

## BENCH DRILLING MACHINES WITH TABLE HEIGHT ADJUSTMENT

Drilling capacity 23 mm

*Photo with options*



	<b>ALZSTAR 23-T iTRONIC</b>
<b>Drilling capacity steel E 335 (St 60)</b>	23 mm
<b>Tapping performance steel E 335 (St 60)</b>	M 14
<b>Tapping performance cast iron EN-GJL-200 (GG 20)</b>	M 16
Short spindle	MT 2
Z-travel of spindle	100 mm
Distance spindle to column	250 mm
Column diameter	90 mm
Table clamping area (width x depth)	370 x 300 mm
T-Slots, number x width x distance	2 x 14 x 160 mm
Distance Spindle-Machine table (intermediate) min.max.	125 / 455 mm
Table height adjustment	manual with crank
Base plate, clamping area (width x depth)	320 x 250 mm
T-Slots, number x width x distance	2 x 14 x 160 mm
Distance spindle / base plate min. /max.	625/625 mm
Feed	manual
Height of the machine without options approx.	1095 mm
Net weight approx.	155 kg
<b>Drive System</b>	infinitely variable
<b>Motor: n = 750 / 1500 rpm</b>	<b>0,6 / 0,95 kW</b>
Spindle Rpm range	125-2400 rpm
<b>Price of the machine without options</b>	<b>6.687,00 €</b>
<b>Motor: n = 750 / 1500 rpm</b>	<b>0,6 / 0,95 kW</b>
Spindle Rpm range	225-4300 rpm
<b>Price of the machine without options</b>	<b>6.687,00 €</b>

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Infinitely variable speed drive,** mechanical variator with lever  
**Spindle protection** electrically secured  
**Push button for starting the Right turn (CW), Push Button for starting the Left turn (CCW), Push Button for Spindle off**  
**EMERGENCY-OFF switch,** self-locking  
**Main switch,** lockable  
**Motor isolation class „F“ (155°C)**

**Connection terminal in the electrics cabinet.** Without cable.  
**Right (CW) and Left (CCW) rotation** under protective control  
**Control Tension 24 Volts**  
**Protection Clas IP 54**  
**Lacquer:** DD-structured signal white RAL 9003,  
 PANTONE 7545c, black

## OPTIONS

09.1	Table/Bench for ALZSTAR 23-T iTRONIC, W x D x H 750 x 700 x 840 mm, Net weight approx. 66 kg	1.283,00 €
12.	LED machine light, adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control functions in the Touch Display	348,00 €
25.	Coolant Attachment B, separate container (40 l), with overload-protected pump, backflow valve and accessories with multiple On/Off control functions in the Touch Display	671,00 €
37.5	Technology Calculator in the Touch Display - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	276,00 €
37.6	Maximum Drill Depth Readout in the Touch Display - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	101,00 €
38.1	Automatic spindle stop while in the upper quill/spindle position, may be switched on/off	101,00 €
38.2	Parts counter visualizing number of downfeed movements with a running spindle, with reset. Spindle total runtime w/o reset. May be switched ON/OFF.	101,00 €
08.	Packaging disposable, L x W x H 1100 x 800 x 1400 mm. net weight approx. 45 kg	63,00 €
08.1	Packing for the Table/Bench (Pos. 09.1), W x D x H 1200 x 800 x 1110 mm, Packing weight approx. 16 kg	51,00 €

## COLUMN DRILLING MACHINES

Drilling capacity 23/30 mm

*Photo with options*



	<b>ALZSTAR 23 iTRONIC</b>	<b>ALZSTAR 30 iTRONIC</b>
<b>Drilling capacity steel E 335 (St 60)</b>	23 mm	30 mm
<b>Tapping performance steel E 335 (St 60)</b>	M 14	M 16
<b>Tapping performance Cast iron EN-GJL-200 (GG 20)</b>	M 16	M 20
Short spindle	MT 2	MT 3
Z-travel of spindle	100 mm	140 mm
Distance spindle to column	250 mm	293 mm
Column diameter	90 mm	115 mm
Table clamping area (width x depth)	370 x 300 mm	514 x 360 mm
T-Slots, number x width x distance	2 x 14 x 160 mm	2 x 14 x 224 mm
Distance spindle/table min./max.	140/670 mm	132/724 mm
Feed	manual	manual
Height of the machine without options approx.	1770 mm	1790 mm
Net weight approx.	175 kg	260 kg
<b>Drive System</b>	infinitely variable	infinitely variable
<b>Motor: n = 750 / 1500 rpm</b>	<b>0,6 / 0,95 kW</b>	<b>1,0 / 1,6 kW</b>
Spindle Rpm range	125-2400 rpm	225-4300 rpm
<b>Price of the machine without options</b>	<b>6.771,00 €</b>	<b>7.668,00 €</b>
<b>Motor: n = 750 / 1500 rpm</b>	<b>0,6 / 0,95 kW</b>	<b>1,0/1,6 kW</b>
Spindle Rpm range	225-4300 rpm	100-1800 rpm
<b>Price of the machine without options</b>	<b>6.771,00 €</b>	<b>7.933,00 €</b>

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Infinitely variable speed drive,** mechanical variator with lever

**Spindle protection** electrically secured

**Push button for starting the Right turn (CW), Push Button for**

**starting the Left turn (CCW), Push Button for Spindle off**

**EMERGENCY-OFF switch,** self-locking

**Main switch,** lockable

**Motor isolation class „F“ (155°C)**

**Cable (w/o plug, 2 m) (ALZSTAR 30)**

**Connection terminal in the electrics cabinet.**

Without cable. (ALZSTAR 23)

**Right (CW) and Left (CCW) rotation** under protective control

**Control Tension 24 Volts**

**Protection Clas IP 54**

**Lacquer:** DD-structured signal white RAL 9003,

PANTONE 7545c, black

## OPTIONS

12.	<b>LED machine light,</b> adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control functions in the Touch Display	<b>348,00 €</b>
25.	<b>Coolant Attachment B,</b> separate container (40 l), with overload-protected pump, backflow valve and accessories with multiple On/Off control functions in the Touch Display	<b>671,00 €</b>
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	<b>276,00 €</b>
37.6	<b>Maximum Drill Depth Readout</b> in the Touch Display - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	<b>101,00 €</b>
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	<b>101,00 €</b>
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime</b> w/o reset. May be switched ON/OFF.	<b>101,00 €</b>
03.	<b>Anchoring set</b>	<b>246,00 €</b>
08.	<b>Packaging disposable,</b> L x W x H 1200 x 800 x 2100 mm. net weight approx. 75 kg	<b>132,00 €</b>

## COLUMN DRILLING MACHINES

Drilling capacity 40 mm

Photo with options



	ALZSTAR 40 iTRONIC	ALZSTAR 40 iTRONIC-V
<b>Drilling capacity steel E 335 (St 60)</b>	40 mm	40 mm
<b>Tapping performance steel E 335 (St 60)</b>	M 24	M 24
<b>Tapping performance Cast iron EN-GJL-200 (GG 20)</b>	M 30	M 30
Short spindle	MT 3	MT 3
Z-travel of spindle	120 mm	120 mm
Distance spindle to column	293 mm	293 mm
Column diameter	115 mm	115 mm
Table clamping area (width x depth)	514 x 360 mm	514 x 360 mm
T-Slots, number x width x distance	2 x 14 x 224 mm	2 x 14 x 224 mm
Distance spindle/table min./max.	117/701 mm	117/701 mm
Feed	manual	0,10 + 0,20 mm/Rev
Height of the machine without options approx.	1840 mm	1840 mm
Net weight approx.	270 kg	285 kg
<b>Drive System</b>	infinitely variable	infinitely variable
<b>Motor: n = 1500 / 3000 rpm</b>	<b>1,45 / 1,9 kW</b>	<b>1,45 / 1,9 kW</b>
Spindle Rpm range	160-2250 rpm	160-2250 rpm
<b>Price of the machine without options</b>	<b>8.450,00 €</b>	<b>9.576,00 €</b>

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Infinitely variable speed drive,** mechanical variator with lever

**Spindle protection** electrically secured

**Push button for starting the Right turn (CW), Push Button for**

**starting the Left turn (CCW), Push Button for Spindle off**

**EMERGENCY-OFF switch,** self-locking

**Main switch,** lockable

**Right (CW) and Left (CCW) rotation** under protective control

**Control Tension 24 Volts**

**Motor isolation class „F“ (155°C)**

**Cable (w/o plug, 2 m)**

**Protection Clas IP 54**

**Lacquer:** DD-structured signal white RAL 9003,

PANTONE 7545c, black

**Overload Feed Protection Switch (ALZSTAR 40 iTRONIC-V)**

**Machine oil in separate bin (ALZSTAR 40 iTRONIC-V)**

## OPTIONS

12.	<b>LED machine light,</b> adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control functions in the Touch Display	348,00 €
25.	<b>Coolant Attachment B,</b> separate container (40 l), with overload-protected pump, backflow valve and accessories with multiple On/Off control functions in the Touch Display	671,00 €
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	276,00 €
37.6	<b>Maximum Drill Depth Readout in the Touch Display</b> - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	101,00 €
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	101,00 €
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime</b> w/o reset. May be switched ON/OFF.	101,00 €
47.1.2	<b>MT 4 Spindle instead of MT 3 Spindle</b>	407,00 €
03.	<b>Anchoring set</b>	246,00 €
08.	<b>Packaging disposable,</b> L x W x H 1200 x 800 x 2100 mm. net weight approx. 75 kg	132,00 €

## BENCH AND COLUMN DRILLING MACHINES

Drilling capacity 23 mm

*Photo with options*



	AX 2-T iTRONIC	AX 2 iTRONIC
<b>Drilling capacity steel E 335 (St 60)</b>	23 mm	23 mm
<b>Tapping performance steel E 335 (St 60)</b>	M 14	M 14
<b>Tapping performance Cast iron EN-GJL-200 (GG 20)</b>	M 16	M 16
Short spindle	MT 2	MT 2
Z-travel of spindle	85 mm	85 mm
Distance spindle to column	250 mm	250 mm
Column diameter	90 mm	90 mm
Table clamping area (width x depth)	370 x 300 mm	370 x 300 mm
T-Slots, number x width x distance	2 x 14 x 160 mm	2 x 14 x 160 mm
Distance spindle/table min./max.	125/455 mm	140/670 mm
Table height adjustment	Crank	Crank
Base plate, clamping area (width x depth)	320 x 250 mm	-
T-Slots, number x width x distance	2 x 14 x 160 mm	-
Distance spindle / base plate min. /max.	625/625 mm	-
Feed	manual	manual
Height of the machine without options approx.	1095 mm	1770 mm
Net weight approx.	160 kg	180 kg
<b>Drive System</b>	infinitely variable	infinitely variable
<b>Motor: n = 750 / 1500 rpm</b>	<b>0,6 / 0,95 kW</b>	<b>0,6 / 0,95 kW</b>
Spindle Rpm range	125-2400 rpm	125-2400 rpm
<b>Price of the machine without options</b>	<b>7.152,00 €</b>	<b>7.215,00 €</b>
<b>Motor: n = 750 / 1500 rpm</b>	<b>0,6 / 0,95 kW</b>	<b>0,6 / 0,95 kW</b>
Spindle Rpm range	225-4300 rpm	225-4300 rpm
<b>Price of the machine without options</b>	<b>7.152,00 €</b>	<b>7.215,00 €</b>

Drilling heads (height adjustable) for Multi-Head Systems RFT, page 39

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Tapping auto-reverse w/o foot switch,** max. 12 tapped holes per minute (tapping capacity depending on Rpm speed) with adjustable mechanical depth stop, with (depth) program functions for 4 tools in the Touch Display

**Infinitely variable speed drive,** mechanical variator with lever

**Spindle protection** electrically secured

**Push button for starting the Right turn (CW), Push Button for starting the Left turn (CCW), Push Button for Spindle off**

**Motor isolation class „F“ (155°C)**

**Connection terminal in the electrics cabinet** (without cable)

**EMERGENCY-OFF switch,** self-locking

**Main switch,** lockable

**Right (CW) and Left (CCW) rotation** under protective control

**Control Tension 24 Volts**

**Protection Clas IP 54**

**Lacquer:** DD-structured signal white RAL 9003,

PANTONE 7545c, black

## OPTIONS

09.1	Table/Bench for AX 2-T iTRONIC, W x D x H 750 x 700 x 840 mm, Net weight approx. 66 kg	1.283,00 €
12.	LED machine light, adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control functions in the Touch Display	348,00 €
20.5	Foot Pedal Reverse Switch for CW and CCW rotations during the tapping process	230,00 €
24.	Coolant Attachment A*, consisting of: Coolant base plate with machined surface 320 x 320 mm and 2 slots, overload protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display (only for AX 2 iTRONIC)	1.154,00 €
25.	Coolant Attachment B, separate container (40 l), with overload-protected pump, backflow valve and accessories with multiple On/Off control functions in the Touch Display	671,00 €
37.5	Technology Calculator in the Touch Display - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	276,00 €
37.6	Maximum Drill Depth Readout in the Touch Display - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	101,00 €
38.1	Automatic spindle stop while in the upper quill/spindle position, may be switched on/off	101,00 €
38.2	Parts counter visualizing number of downfeed movements with a running spindle, with reset. Spindle total runtime w/o reset. May be switched ON/OFF.	101,00 €
50.6	Precision Mechanical Depth Adjuster and fixed stop, Precision adjustment to 0,1 mm (spindle stroke reduced by 20 mm)	349,00 €
03.	Anchoring set for AX 2 iTRONIC	246,00 €
08.	Packaging disposable wood for AX 2-T iTRONIC, L x W x H 1100 x 800 x 1400 mm. net weight approx. 45 kg for AX 2 iTRONIC, L x W x H 1200 x 800 x 2100 mm. net weight approx. 75 kg	63,00 € 132,00 €
08.1	Packing for the Table/Bench (Pos. 09.1), W x D x H 1200 x 800 x 1110 mm, Packing weight approx. 16 kg for AX 2-T iTRONIC.	51,00 €

\*) = Net weight increases with 80 kg

Special Accessories page 42/43

Special equipment page 44

## COLUMN DRILLING MACHINES

Drilling capacity 30/40 mm

Photo with options



	AX 3s iTRONIC	AX 3 iTRONIC	AX 3 iTRONIC-V
<b>Drilling capacity steel E 335 (St 60)</b>	30 mm	40 mm	40 mm
<b>Tapping performance steel E 335 (St 60)</b>	M 16	M 24	M 24
<b>Tapping performance Cast iron EN-GJL-200 (GG 20)</b>	M 20	M 30	M 30
Short spindle	MT 3	MT 3	MT 3
Z-travel of spindle	140 mm	120 mm	120 mm
Distance spindle to column	293 mm	293 mm	293 mm
Column diameter	115 mm	115 mm	115 mm
Table clamping area (width x depth)	514 x 360 mm	514 x 360 mm	514 x 360 mm
Distance spindle/table min./max.	132/724 mm	117/701 mm	117/701 mm
T-Slots, number x width x distance	2 x 14 x 224 mm	2 x 14 x 224 mm	2 x 14 x 224 mm
Feed	manual	manual	0,1 + 0,2 mm/Rev
Height of the machine without options approx.	1790 mm	1840 mm	1840 mm
Net weight approx.	260 kg	260 kg	270 kg
<b>Drive System</b>	infinitely variable	infinitely variable	infinitely variable
<b>Motor: n = 750 / 1500 rpm</b>	<b>1,0 / 1,6 kW</b>	<b>1,0 / 1,6 kW</b>	<b>1,0 / 1,6 kW</b>
Spindle Rpm range	225-4300 rpm	80-1125 rpm	80-1125 rpm
<b>Price of the machine without options</b>	<b>9.012,00 €</b>	<b>9.153,00 €</b>	<b>10.605,00 €</b>
<b>Motor: n = 750 / 1500 rpm</b>	<b>1,0 / 1,6 kW</b>	-	-
Spindle Rpm range	100-1800 rpm	-	-
<b>Price of the machine without options</b>	<b>9.275,00 €</b>	-	-
<b>Motor: n = 1500 / 3000 rpm</b>	-	<b>1,45 / 1,9 kW</b>	<b>1,45 / 1,9 kW</b>
Spindle Rpm range	-	160-2250 rpm	160-2250 rpm
<b>Price of the machine without options</b>	-	<b>9.153,00 €</b>	<b>10.605,00 €</b>

Drilling heads (height-adjustable) for multi-head systems RFT, page 40/41.

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Tapping auto-reverse w/o foot switch,** max. 6 tapped holes per minute (tapping capacity depending on Rpm speed) with adjustable mechanical depth stop, with (depth) program functions for 4 tools in the Touch Display

**Infinitely variable speed drive,** mechanical variator with lever  
**Spindle protection** electrically secured

**Push button for starting the Right turn (CW), Push Button for starting the Left turn (CCW), Push Button for Spindle off**

**EMERGENCY-OFF** switch, self-locking

**Motor isolation class „F“ (155°C)**

**Cable w/o plug, 2 m (AX 3s)**

**Connection terminal in the electrics cabinet** (without cable) (AX 3 iTRONIC(-V))

**Main switch,** lockable

**Right (CW) and Left (CCW) rotation** under protective control

**Control Tension 24 Volts**

**Protection Clas IP 54**

**Lacquer:** DD-structured signal white RAL 9003,

PANTONE 7545c, black

**Overload Feed Protection Switch** (AX 3 iTRONIC-V)

**Machine oil in separate bin** (AX 3 iTRONIC-V)

## OPTIONS

12.	<b>LED machine light,</b> adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control function in the Touch Display	348,00 €
20.5	<b>Foot Pedal Reverse Switch for CW and CCW rotations during the tapping process</b>	230,00 €
24.	<b>Coolant Attachment A*,</b> consisting of: Coolant base plate with machined surface 320 x 320 mm and 2 slots, overload protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display	1.154,00 €
25.	<b>Coolant Attachment B,</b> separate container (40 l), with overload-protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display	671,00 €
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	276,00 €
37.6	<b>Maximum Drill Depth Readout in the Touch Display</b> - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	101,00 €
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	101,00 €
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime w/o reset.</b> May be switched ON/OFF.	101,00 €
42.	<b>Column extension + 200 mm</b> (tall operators, tapping devices, multi-spindle heads, turrets, reducer sleeves, etc.)	678,00 €
47.1.2	<b>MT 4 Spindle instead of MT 3 Spindle</b> (not for AX 3s iTRONIC)	407,00 €
50.6	<b>Precision Mechanical Depth Adjuster and fixed stop,</b> Precision adjustment to 0,1 mm	349,00 €
03.	<b>Anchoring set</b>	246,00 €
08.	<b>Packaging</b> disposable wood, L x W x H 1200 x 800 x 2100 mm. net weight approx. 75 kg	132,00 €

\*) = Net weight increases with 80 kg

Special Accessories page 42/43

Special equipment page 44

## COLUMN DRILLING MACHINE

Drilling capacity 55 mm

*Photo with options*



	AX 4 iTRONIC	AX 4 iTRONIC
		with 3 kW motor
<b>Drilling capacity steel E 335 (St 60)</b>	55 mm	55 mm
<b>Tapping performance steel E 335 (St 60)</b>	M 30	M 42
<b>Tapping performance Cast iron EN-GJL-200 (GG 20)</b>	M 36	M 56
Short spindle	MT 4	MT 4
Z-travel of spindle	140 mm	140 mm
Distance spindle to column	300 mm	300 mm
Column diameter	145 mm	145 mm
Table clamping area (width x depth)	615 x 430 mm	615 x 430 mm
Distance spindle/table min./max.	150/735 mm	150/735 mm
T-Slots, number x width x distance	2 x 14 x 224 mm	2 x 14 x 224 mm
Feed	0,1 + 0,3 mm/Rev	0,1 + 0,3 mm/Rev
Height of the machine without options approx.	1850 mm	1850 mm
Net weight approx.	380 kg	380 kg
<b>Drive System</b>	infinitely variable	infinitely variable with 2-step gear box
<b>Motor:</b> n = 750/1500 rpm	<b>1,8 / 2,9 kW</b>	-
Spindle Rpm range	70-1200 rpm	-
<b>Price of the machine without options</b>	<b>14.791,00 €</b>	-
<b>Motor:</b> n = 1500 rpm	-	<b>3,0 kW</b>
Spindle Rpm range	-	70-2400 rpm
<b>Price of the machine without options</b>	-	<b>17.513,00 €</b>

Drilling heads for multi-head systems RFT, page 38/41.

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Tapping auto-reverse w/o foot switch,** max. 6 tapped holes per minute (tapping capacity depending on Rpm speed) with adjustable mechanical depth stop, with (depth) program functions for 4 tools in the Touch Display

**Infinitely variable speed drive,** mechanical variator with lever

**Spindle protection** electrically secured

**Push button for starting the Right turn (CW), Push Button for starting the Left turn (CCW), Push Button for Spindle off**

**EMERGENCY-OFF switch,** self-locking

**Motor isolation class „F“ (155°C)**

**Connection terminal in the electrics cabinet** (without cable)

**Main switch,** lockable

**Right (CW) and Left (CCW) rotation** under protective control

**Control Tension 24 Volts**

**Protection Clas IP 54**

**Lacquer:** DD-structured signal white RAL 9003,

PANTONE 7545c, black

**Overload Feed Protection Switch**

**Machine oil** in separate bin

## OPTIONS

12.	<b>LED machine light,</b> adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control function in the Touch Display	348,00 €
20.5	<b>Foot Pedal Reverse Switch for CW and CCW rotations during the tapping process</b>	230,00 €
24.	<b>Coolant Attachment A*</b> , consisting of: Coolant base plate with machined surface 320 x 320 mm and 2 slots, overload protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display	1.154,00 €
25.	<b>Coolant Attachment B,</b> separate container (40 l), with overload-protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display	671,00 €
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	276,00 €
37.6	<b>Maximum Drill Depth Readout in the Touch Display</b> - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	101,00 €
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	101,00 €
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime w/o reset</b>	101,00 €
42.	<b>Column extension + 200 mm</b> (tall operators, tapping devices, multi-spindle heads, turrets, reducer sleeves, etc.)	678,00 €
50.6	<b>Precision Mechanical Depth Adjuster and fixed stop,</b> Precision adjustment to 0,1 mm (spindle stroke reduced by 10 mm)	349,00 €
03.	<b>Anchoring set</b>	246,00 €
08.	<b>Packaging</b> disposable wood L x W x H 1200 x 800 x 2100 mm. net weight approx. 75 kg	132,00 €

\*) = Net weight increases with 60 kg

Special Accessories page 42/43

Special equipment page 44

**COLUMN AND SEMI-BOX COLUMN  
DRILLING MACHINES**

Drilling capacity 30/40 mm

Photo with options



	AB 26 iTRONIC	AB 34 iTRONIC	AB 34 iTRONIC-HST
Drilling performance steel E 335 (St 60)	26 mm	34 mm	34 mm
Drilling performance Cast iron EN-GJL-200 (GG 20)	30 mm	40 mm	40 mm
Drilling capacity steel E 335 (St 60)	30 mm	40 mm	40 mm
Tapping performance steel E 335 (St 60)	M 20	M 24	M 24
Tapping performance Cast iron EN-GJL-200 (GG 20)	M 24	M 30	M 30
Short spindle	MT 3	MT 4	MT 4
Distance spindle to column	293 mm	300 mm	330 mm
Table clamping area (width x depth)	514 x 360 mm	615 x 430 mm	742 x 460 mm
T-Slots, number x width x distance	2 x 14 x 224 mm	2 x 14 x 224 mm	2 x 14 x 224 mm
Distance spindle/table min./max.	90/675 mm	147/688 mm	266/928 mm
Column diameter / Box Column width	115 mm	145 mm	290 mm
Z-travel of spindle	160 mm	160 mm	160 mm
Feeds	0,1-0,2-0,3-0,4 mm/ Rev	0,1-0,2-0,3-0,4 mm/ Rev	0,1-0,2-0,3-0,4 mm/ Rev
Height of the machine without options approx.	1865 mm	1865 mm	2110 mm
Net weight approx.	380 kg	470 kg	760 kg
<b>Drive System</b>	infinitely variable	infinitely variable	infinitely variable
<b>Motor: n = 750/1500 rpm</b>	<b>1,0 / 1,6 kW</b>	<b>1,4 / 2,2 kW</b>	<b>1,4 / 2,2 kW</b>
Spindle Rpm range	120-2200 rpm	100-1800 rpm	100-1800 rpm
<b>Price of the machine without options</b>	<b>12.758,00 €</b>	<b>15.138,00 €</b>	<b>22.098,00 €</b>
The "Autodigit" version includes the basic machine with option 37.3.	<b>AB 26 iTRONIC AUTODIGIT</b>	<b>AB 34 iTRONIC AUTODIGIT</b>	<b>AB 34 iTRONIC-HST AUTODIGIT</b>
<b>Motor: n = 750/1500 rpm</b>	<b>1,0 / 1,6 kW</b>	<b>1,4 / 2,2 kW</b>	<b>1,4 / 2,2 kW</b>
Spindle Rpm range	120-2200 rpm	100-1800 rpm	100-1800 rpm
<b>Price of the machine without options incl. option 37.3</b>	<b>14.314,00 €</b>	<b>16.694,00 €</b>	<b>23.654,00 €</b>

Drilling heads for multi-head systems RFT, page 38/41.

Option 37.3 AUTODIGIT with 4 tools. For each tool 4 parameters may be defined:

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Tapping auto-reverse w/o foot switch,** max. 6 tapped holes per minute (tapping capacity depending on Rpm speed) with adjustable mechanical depth stop, with (depth) program functions for 4 tools in the Touch Display

**Infinitely variable speed drive,** mechanical variator with lever  
**Spindle protection** electrically secured

**Push button for starting the Right turn (CW), Push Button for starting the Left turn (CCW), Push Button for Spindle off**

**EMERGENCY-OFF** switch, self-locking

**Main switch,** lockable

**Connection terminal in the electrics cabinet** (without cable)  
**Right (CW) and Left (CCW)** rotation under protective control

**Control Tension 24 Volts**

**Protection Clas IP 54**

**Motor Isolation Class "F" (155°)**

**Lacquer:** DD-structured signal white RAL 9003,

PANTONE 7545c, black

**Electro-Magnetic Feed Clutch with three Cross Handle Switches and Overload Feed Protection**

**Machine oil in separate bin**

## OPTIONS

12.	<b>LED machine light,</b> adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control function in the Touch Display	348,00 €
20.4	<b>Comfortable Spindle Reverse Switch at the Cross Lever</b> for CW and CCW rotations during the tapping process. Additional function.	230,00 €
20.5	<b>Foot Pedal Reverse Switch for CW and CCW rotations during the tapping process</b>	230,00 €
24.	<b>Coolant Attachment A*</b> , consisting of: Coolant base plate with machined surface 320 x 320 mm and 2 slots, overload protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display (only for AB 26 iTRONIC and AB 34 iTRONIC)	1.154,00 €
25.	<b>Coolant Attachment B,</b> separate container (40 l), with overload-protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display	671,00 €
37.3	<b>AUTODIGIT Automatic Drill Depth Control with:</b> Drill Depth programming, interval drilling and free cutting possibility. Multiple settings in the Touch Display (Autodigit). Memory for 4 tools (RPM and zero point).	1.556,00 €
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	276,00 €
37.6	<b>Maximum Drill Depth Readout in the Touch Display</b> - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	101,00 €
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	101,00 €
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime</b> w/o reset. May be switched ON/OFF.	101,00 €
42.	<b>Column extension + 200 mm</b> (tall operators, tapping devices, multi-spindle heads, turrets, reducer sleeves, etc.) (only for AB 26 and AB34 iTRONIC)	678,00 €
50.6	<b>Precision Mechanical Depth Adjuster and fixed stop,</b> Precision adjustment to 0,1 mm	349,00 €
03.	<b>Anchoring set</b>	246,00 €
07	<b>Wooden packing, disposable for AB 34 iTRONIC-HST</b> L x W x H 2400 x 1000 x 1500 mm, net weight approx. 135 kg	263,00 €
08.	<b>Packaging, disposable wood for AB 26 iTRONIC and AB 34 iTRONIC,</b> L x W x H 1200 x 800 x 2100 mm. net weight approx. 75 kg	132,00 €

\*) = Net weight increases with 80 kg (AB 26 iTRONIC), with 60 kg (AB 34 iTRONIC)

Special Accessories page 42/43

Special equipment page 44

**COLUMN AND SEMI-BOX COLUMN  
DRILLING MACHINES**

Drilling capacity 50 mm

Photo with options




	AB 40 iTRONIC	AB 40 iTRONIC-HST
<b>Drilling performance steel E 335* (St 60)</b>	40 mm	40 mm
<b>Drilling performance Cast iron EN-GJL-200* (GG 20)</b>	46 mm	46 mm
<b>Drilling capacity steel E 335* (St 60)</b>	50 mm	50 mm
<b>Tapping performance steel E 335* (St 60)</b>	M 30	M 30
<b>Tapping performance Cast iron EN-GJL-200*</b>	M 36	M 36
Short spindle	MT 4	MT 4
Distance spindle to column	300 mm	330 mm
Table clamping area (width x depth)	615 x 430 mm	742 x 460 mm
T-Slots, number x width x distance	2 x 14 x 224 mm	2 x 14 x 224 mm
Distance spindle/table min./max.	147/688 mm	266/928 mm
Column diameter / Box Column width	145 mm	290 mm
Z-travel of spindle	160 mm	160 mm
Feed(s)	0,1-0,2-0,3-0,4 mm/Rev	0,1-0,2-0,3-0,4 mm/Rev
Height of the machine without options approx.	1885 mm	2110 mm
Net weight approx.	470 kg	760 kg
<b>Drive System</b>	infinitely variable	infinitely variable
<b>Motor: n = 750/1500 rpm</b>	<b>1,8 / 2,9 kW</b>	<b>1,8 / 2,9 kW</b>
Spindle Rpm range	100-1600 rpm	100-1600 rpm
<b>Price of the machine without options</b>	<b>18.274,00 €</b>	<b>24.176,00 €</b>
<b>Motor: n = 750/1500 rpm (with gear)</b>	<b>1,8 / 2,9 kW</b>	<b>1,8 / 2,9 kW</b>
Spindle Rpm range	70-4000 rpm	70-4000 rpm
<b>Price of the machine without options</b>	<b>19.578,00 €</b>	<b>25.481,00 €</b>
The "Autodigit" version includes the basic machine with option 37.3.	<b>AB 40 iTRONIC AUTODIGIT</b>	<b>AB 40 iTRONIC-HST AUTODIGIT</b>
<b>Motor: n = 750/1500 rpm</b>	<b>1,8 / 2,9 kW</b>	<b>1,8 / 2,9 kW</b>
Spindle Rpm range	100-1600 rpm	100-1600 rpm
<b>Price of the machine without options inkl. Option 37.3</b>	<b>19.830,00 €</b>	<b>25.732,00 €</b>

Drilling heads for multi-head systems RFT, page 38/41.

\* Drilling performance and capacity only with motor 750/1500 rpm with gear.

**Option 37.3 AUTODIGIT with 4 tools. For each tool 4 parameters may be defined:**

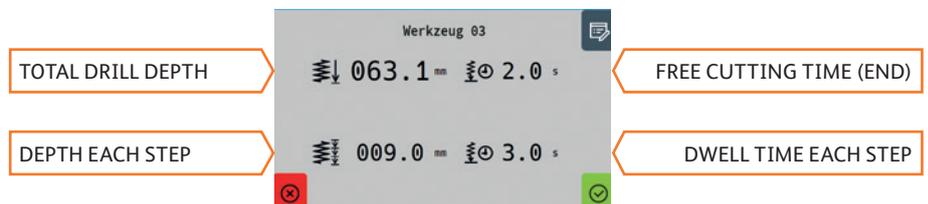

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, **automatic Rpm Control**, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Tapping auto-reverse w/o foot switch**, max. 6 tapped holes per minute (tapping capacity depending on Rpm speed) with adjustable mechanical depth stop, with (depth) program functions for 4 tools in the Touch Display

**Infinitely variable speed drive**, Rpm setting in the display (without lever)

**Automatic Rpm control**

**Spindle protection** electrically secured

**Push button for starting the Right turn (CW), Push Button for starting the Left turn (CCW), Push Button for Spindle off**

**EMERGENCY-OFF switch**, self-locking

**Cable w/o plug**, 2 m

**Main switch**, lockable

**Right (CW) and Left (CCW) rotation** under protective control

**Control Tension 24 Volts**

**Protection Clas IP 54**

**Motor isolation class „F“ (155°C)**

**Lacquer: DD-structured signal white RAL 9003,**

**PANTONE 7545c, black**

**Electro-Magnetic Feed Clutch** with three Cross Handle Switches and Overload Feed Protection

**Machine oil in separate bin**

## OPTIONS

12.	<b>LED machine light</b> , adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control function in the Touch Display	348,00 €
20.4	<b>Comfortable Spindle Reverse Switch at the Cross Lever</b> for CW and CCW rotations during the tapping process. Additional function.	230,00 €
20.5	<b>Foot Pedal Reverse Switch</b> for CW and CCW rotations during the tapping process	230,00 €
24.	<b>Coolant Attachment A*</b> , consisting of: Coolant base plate with machined surface 320 x 320 mm and 2 slots, overload protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display (AB 40 iTRONIC).	1.154,00 €
25.	<b>Coolant Attachment B</b> , separate container (40 l), with overload-protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display	671,00 €
37.3	<b>AUTODIGIT Automatic Drill Depth Control with:</b> Drill Depth programming, interval drilling and free cutting possibility. Multiple settings in the Touch Display (Autodigit). Memory for 4 tools (RPM and zero point).	1.556,00 €
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed.	276,00 €
37.6	<b>Maximum Drill Depth Readout in the Touch Display</b> - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	101,00 €
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	101,00 €
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime w/o reset.</b> May be switched ON/OFF.	101,00 €
42.	<b>Column extension + 200 mm</b> (tall operators, tapping devices, multi-spindle heads, turrets, reducer sleeves, etc.) (only for AB 40 iTRONIC)	678,00 €
50.6	<b>Precision Mechanical Depth Adjuster and fixed stop</b> , Precision adjustment to 0,1 mm (spindle stroke reduced by 20 mm)	349,00 €
51.1	<b>Special "half" feeds</b> Replacing the original feeds with 0,05 - 0,10 - 0,15 - 0,20 mm/Rot.	540,00 €
03.	<b>Anchoring set</b>	246,00 €
07	<b>Wooden packing, disposable for AB 40 iTRONIC-HST</b> , L x W x H 2400 x 1000 x 1500 mm, net weight approx. 135 kg	263,00 €
08.	<b>Wooden packaging, disposable for AB 40 iTRONIC</b> L x W x H 1200 x 800 x 2100 mm. net weight approx. 75 kg	132,00 €

\*) = Net weight increases with 60 kg AB 40 iTRONIC

Special Accessories page 42/43

Special equipment page 44

**COLUMN AND SEMI-BOX COLUMN  
DRILLING MACHINES**

Drilling capacity 60 mm

*Photo with options*



	Column <b>AB 50/SV</b>	Semi-Box Column <b>AB 50/HST</b>
Drilling performance steel E 335* (St 60)	50 mm	50 mm
Drilling performance Cast iron EN-GJL-200* (GG 20)	60 mm	60 mm
Drilling capacity steel E 335* (St 60)	60 mm	60 mm
Tapping performance steel E 335* (St 60) <i>(Option 20.0 or 20.1 required)</i>	M 42	M 42
Tapping performance Cast iron EN-GJL-200* (GG 20) <i>(Option 20.0 or 20.1 required)</i>	M 60	M 60
Short spindle	MT 4	MT 4
Distance spindle to column	350 mm	330 mm
Table clamping area (width x depth)	720 x 510 mm	742 x 460 mm
T-Slots, number x width x distance	2 x 14 x 224 mm	2 x 14 x 224 mm
Distance spindle/table min./max	138/874 mm	257/919 mm
Column diameter / Box Column width	200 mm	290 mm
Z-travel of spindle	200 mm	200 mm
Feeds (mm/Rev.)	0,15-0,2-0,3-0,36	0,15-0,2-0,3-0,36
Machine height without options approx.	1950 mm	2135 mm
Net weight approx.	605 kg	850 kg
<b>Drive System</b>	infinitely variable with gear box	
Motor: n = 1500/3000 rpm	<b>3,6 / 4,3 kW</b>	<b>3,6 / 4,3 kW</b>
Spindle Rpm range	60-1530 rpm	60-1530 rpm
<b>Price of the machine without options</b>	<b>20.984,00 €</b>	<b>26.340,00 €</b>
Motor: n = 1500/3000 rpm	<b>3,6 / 4,3 kW</b>	<b>3,6 / 4,3 kW</b>
Spindle Rpm range	50-1280 rpm	50-1280 rpm
<b>Price of the machine without options</b>	<b>20.984,00 €</b>	<b>26.340,00 €</b>

\* Please note: Performance data relating to rpm range n = 50-1280 rpm only

## Standard Equipment

**Electro-magnetic feed clutch** with Overload Feed Protection and Electrical Cross Handle Switches

**Main switch** lockable

**Overload Protection Switch**

**Protective control** for clockwise rotation

**Self-Locking Mushroom Button** for Emergency-Off

**Infinitely variable speed drive**, mechanical variator

**Digital RPM Read-out**

**Motor Isolation Class "F"** (155°)

**Connection terminal in the electrics cabinet** (without cable)

**Protection class IP 54**

**Machined Base Plate**, with T-slots (AB 50/SV only), clamping area 380 x 450 mm (width x depth)

**Spindle protection** electrically secured

**Lacquer**: DD-structured signal white RAL 9003, PANTONE 7545c, black.

**Machine oil**

**Attention**: W/O Tapping device (option 20.0 or 20.1)

## OPTIONS

10.	Spindle Reverse switch for CC and CCW rotation with 0-position	35,00 €
12.	LED machine light, adjustable angle, 230 V, IP 65	431,00 €
20.0	Tapping Attachment w/o foot switch, max. 6 tapped holes per minute (tapping capacity depending on Rpm speed), auto-reverse end stop	1.157,00 €
20.1	Tapping Attachment with reverse foot switch, max. 6 tapped holes per minute (tapping capacity depending on Rpm speed), auto-reverse end stop	1.361,00 €
24.	Coolant Attachment A*, consisting of: Coolant Base plate with machined surface 450 x 460 mm and 2 slots, overload protected pump, backflow valve and accessories (for AB 50/SV only)	1.045,00 €
25.	Coolant Attachment B, consisting of: separate container (40 l), with overload protected pump, backflow valve and accessories	560,00 €
42.	Column extension + 200 mm (tall operators, tapping devices, multi-spindle heads, turrets, reducer sleeves, etc.) (for AB 50/SV only)	814,00 €
50.6	Precision Depth Adjuster and fixed stop. Precision adjustment to 0,1 mm	349,00 €
03.	Anchoring set	246,00 €
07	Wooden packing, disposable AB 50/HST L x W x H 2400 x 1000 x 1600 mm, net weight approx. 135 kg	263,00 €
08.	Wooden packing, disposable AB 50/SV L x W x H 2200 x 800 x 1600 mm, net weight approx. 105 kg	229,00 €

\*) = net weight increases with 115 kgs (AB 50/SV)

Special Accessories page 42/43

Special equipment page 44

**COLUMN DRILLING MACHINE FOR BOTH FLOW DRILLING AND STANDARD DRILLING**


Flow Drilling capacity 12 mm

Photo with options



	<b>ALZFLOW 30 iTRONIC</b>
Flow Drilling capacity steel DC 01A (St 12.03) (sheet metal thickness 2,5 mm)	12 mm
Flow Tapping performance steel DC 01A (St 12.03)	M 12
Drilling capacity steel E 335 (St 60)	30 mm
Tapping performance steel E 335 (St 60)	M 16
Tapping performance Cast iron EN-GJL-200 (GG 20)	M 20
Short spindle	MT 3
Z-travel of spindle	140 mm
Distance spindle to column	293 mm
Column diameter	115 mm
Table clamping area (width x depth)	514 x 360 mm
T-Slots, number x width x distance	2 x 14 x 224 mm
Distance spindle/table min./max.	132/724 mm
Feed	manual
Height of the machine without options approx.	1790 mm
Net weight approx.	260 kg
<b>Drive System</b>	infinitely variable
Motor: n = 750/1500 rpm	<b>1,0/1,6 kW</b>
Spindle Rpm range	225-4300 rpm
<b>Price of the machine without options</b>	<b>8.820,00 €</b>

**Chipless Flow Drilling and Cold roll threading**

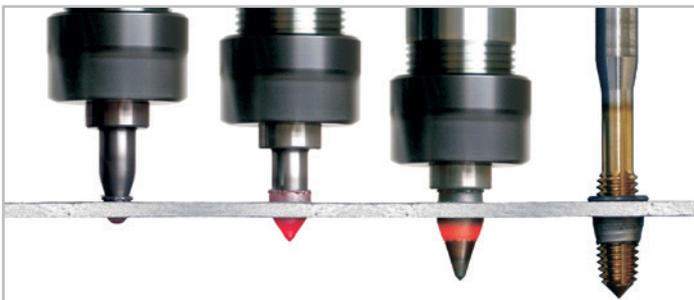

Process sequence



Examples

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Tapping auto-reverse w/o foot switch,** max. 6 tapped holes per minute (tapping capacity depending on Rpm speed) with adjustable mechanical depth stop, with (depth) control functions for 4 tools in the Touch Display.

**Infinitely variable speed drive,** mechanical variator with lever

**Spindle protection** electrically secured

**Push button for starting the Right turn (CW), Push Button for starting the Left turn (CCW), Push Button for Spindle off**

**Motor Isolation Class "F" (155°)**

**Connection terminal in the electrics cabinet** (without cable)  
**EMERGENCY-OFF** switch, self-locking

**Main switch,** lockable

**Right (CW) and Left (CCW) rotation** under protective control

**Control Tension 24 Volts**

**Protection Clas IP 54**

**Motor Isolation Class "F" (155°)**

**Lacquer:** DD-structured signal white RAL 9003,

**PANTONE 7545c, black**

## OPTIONS

12.	<b>LED machine light,</b> adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control functions in the Touch Display	<b>348,00 €</b>
20.5	<b>Foot Pedal Reverse Switch for CW and CCW rotations</b> during the tapping process	<b>230,00 €</b>
25.	<b>Coolant Attachment B,</b> separate container (40 l), with overload-protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display	<b>671,00 €</b>
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed	<b>276,00 €</b>
37.6	<b>Maximum Drill Depth Readout in the Touch Display</b> - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	<b>101,00 €</b>
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	<b>101,00 €</b>
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime</b> w/o reset. May be switched ON/OFF.	<b>101,00 €</b>
50.6	<b>Precision mechanical depth adjuster and fixed stop,</b> precision adjustment to 0,1 mm	<b>349,00 €</b>
03.	<b>Anchoring set</b>	<b>246,00 €</b>
08.	<b>Packaging, disposable wood</b> L x W x H 1200 x 800 x 2100 mm. net weight approx. 75 kg	<b>132,00 €</b>

Special Accessories page 42/43

Special equipment page 44

**COLUMN DRILLING MACHINE FOR BOTH FLOW DRILLING AND STANDARD DRILLING**


Flow Drilling capacity 20 mm

Photo with options



	<b>AB-FLOW 40 iTRONIC</b>	<b>AB-FLOW 40 iTRONIC-HST</b>
Flow Drilling capacity steel DC 01A (St 12.03) (sheet metal thickness 2,5 mm)	20 mm	20 mm
Flow Tapping performance steel DC 01A (St 12.03)	M 20	M 20
Drilling capacity steel E 335 (St 60)	40 mm	40 mm
Tapping performance steel E 335 (St 60)	M 30	M 30
Tapping performance Cast iron EN-GJL-200 (GG 20)	M 36	M 36
Short spindle	MT 4	MT 4
Z-travel of spindle	160 mm	160 mm
Distance spindle to column	300 mm	330 mm
Column diameter/ box column width	145 mm	290 mm
Table clamping area (width x depth)	615 x 430 mm	742 x 460 mm
T-Slots, number x width x distance	2 x 14 x 224 mm	2 x 14 x 224 mm
Distance spindle/table min./max.	147/688 mm	266/928 mm
Feed (mm/Rot.)	0,1-0,2-0,3-0,4	0,1-0,2-0,3-0,4
Height of the machine without options approx.	1885 mm	2110 mm
Net weight approx.	470 kg	760 kg
<b>Drive System</b>	infinitely variable	infinitely variable
Motor: n = 1500 rpm	<b>4,0 kW (with gear)</b>	<b>4,0 kW (with gear)</b>
Spindle Rpm range	140-4000 rpm	140-4000 rpm
<b>Price of the machine without options</b>	<b>20.336,00 €</b>	<b>26.120,00 €</b>

**Chipless Flow Drilling and Cold roll threading**

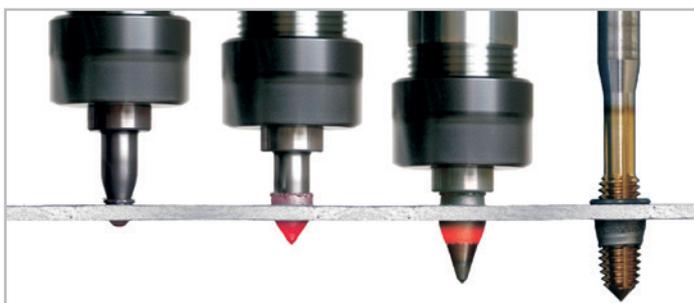

Process sequence



Examples

## Standard Equipment

**7" TFT - LCD-MULTI-TOUCH Display:** Memorization of a nominal spindle speed, **automatic Rpm Control**, read out of the actual spindle speed, actual drill depth read out with zero setting (drill start), virtual depth scale, machine's status indicators, warnings, service information, language selection DE/EN/FR/ES/IT/NL/RU.

**Tapping auto-reverse w/o foot switch**, max. 6 tapped holes per minute (tapping capacity depending on Rpm speed) with adjustable mechanical depth stop, with (depth) program functions for 4 tools in the Touch Display.

**Infinitely variable speed drive**, Rpm setting in the display (without lever)

**Automatic Rpm control**

**Spindle protection** electrically secured

**Push button for starting the Right turn (CW), Push Button for starting the Left turn (CCW), Push Button for Spindle off**

**EMERGENCY-OFF** switch, self-locking

**Cable**, w/o plug, 2 m

**Main switch**, lockable

**Right (CW) and Left (CCW) rotation** under protective control

**Control Tension 24 Volts**

**Protection Clas IP 54**

**Motor isolation class „F“ (155°C)**

**Lacquer:** DD-structured signal white RAL 9003,

PANTONE 7545c, black

**Electro-Magnetic Feed Clutch** with three Cross Handle

Switches and Overload Feed Protection

**Machine oil in separate bin**

## OPTIONS

12.	<b>LED machine light</b> , adjustable angle, connecting tension 24 V, protection class IP 65, with On/Off control function in the Touch Display	348,00 €
20.4	<b>Comfortable Spindle Reverse Switch at the Cross Lever for CW and CCW rotations</b> during the tapping process . Additional function.	230,00 €
20.5	<b>Foot Pedal Reverse Switch for CW and CCW rotations</b> during the tapping process	230,00 €
24.	<b>Coolant Attachment A*</b> , consisting of: Coolant base plate with machined surface 320 x 320 mm and 2 slots, overload protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display (AB-FLOW 40 iTRONIC).	1.154,00 €
25.	<b>Coolant Attachment B</b> , separate container (40 l), with overload-protected pump, backflow valve and accessories, with multiple On/Off control functions in the Touch Display	671,00 €
37.3	<b>AUTODIGIT Automatic Drill Depth Control with:</b> Drill Depth programming, interval drilling and free cutting possibility. Multiple settings in the Touch Display (Autodigit). Memory for 4 tools (RPM and zero point).	1.556,00 €
37.5	<b>Technology Calculator in the Touch Display</b> - calculation of cutting parameters by choosing a process, by inputting the tool diameter, by selecting a listed material and its cutting speed. The calculated value can be memorized in the main screen, visualizing the nominal speed vs. the actual speed	276,00 €
37.6	<b>Maximum Drill Depth Readout in the Touch Display</b> - measuring function for gauging the actual machined drill depth or counterbore depth. Useful for calibration purposes	101,00 €
38.1	<b>Automatic spindle stop</b> while in the upper quill/spindle position, may be switched on/off	101,00 €
38.2	<b>Parts counter</b> visualizing number of downfeed movements with a running spindle, with reset. <b>Spindle total runtime</b> w/o reset. May be switched ON/OFF.	101,00 €
50.6	<b>Precision Mechanical Depth Adjuster and fixed stop</b> , Precision adjustment to 0,1 mm	349,00 €
51.1	<b>Special "half" feeds</b> Replacing the original feeds with 0,05 - 0,10 - 0,15 - 0,20 mm/Rot.	540,00 €
03.	<b>Anchoring set</b>	246,00 €
07	<b>Wooden packing, disposable for AB 40 iTRONIC-HST</b> L x W x H 2400 x 1000 x 1600 mm, net weight approx. 135 kg	263,00 €
08.	<b>Wooden packaging, disposable for AB-FLOW 40 iTRONIC</b> L x W x H 1200 x 800 x 2100 mm. net weight approx. 75 kg	132,00 €

\* Net weight increases with 80 kg AB-FLOW 40 iTRONIC

Special Accessories page 42/43

Special equipment page 44

**RADIAL DRILLING MACHINES**  
**AB 30/R-1000 AND AB 30/R-1400**

Drilling capacity 45/50 mm

Photo with options



	<b>AB 30/R-1000</b> <b>AB 30/R-1400</b> with 1,5 kW Motor	<b>AB 30/R-1000</b> <b>AB 30/R-1400</b> with 3,0 kW Motor
Drilling performance steel E 335 (St 60)	32 mm	40 mm
Drilling performance Cast iron EN-GJL-200* (GG 20)	45 mm	50 mm
Drilling capacity steel E 335 (ST 60)	45 mm	50 mm
Tapping performance steel E 335 (St 60) <i>(Option 20.0 or 20.1 required)</i>	M 30	M 30
Tapping performance Cast iron EN-GJL-200(GG 20) <i>(Option 20.0 or 20.1 required)</i>	M 42	M 42
Short spindle	MT 4	
Diameter of Column with AB 30/R-1000 / with AB 30/R-1400	220 mm / 300 mm	
Travel of radial arm AB 30/R-1000 / AB 30/R-1400	730 mm / 1100 mm	
Drilling radius min. max. AB 30/R-1000 / AB 30/R-1400	240/970 mm / 220/1320 mm	
Base plate, clamping area (b x t) AB 30/R-1000 / AB 30/R-1400	960 x 520 mm / 1365 x 640 mm	
Height of the base plate AB 30/R-1000 / AB 30/R-1400	190 mm / 230 mm	
T-Slots, number x width x distance	2 x 18 x 250 mm	
Distance Spindle - Base plate min./max. AB 30/R-1000 / AB 30/R-1400	510/1220 mm / 565/1305 mm	
Height of the machine without options approx. AB 30/R-1000 / AB 30/R-1400	2428 mm / 2564 mm	
Travel Motor	0,75 kW	
4 feeds	0,15-0,2-0,3-0,36 mm/Rot.	
Z-travel of spindle (Alt. Pos. 54)	160 mm	
Net weight approx. with AB 30/R-1000	1250 kg	
Net weight approx. with AB 30/R-1400	1650 kg	
<b>Drive System</b>	Gear box	
<b>Motor: n = 1500 rpm</b>	<b>1,5 kW</b>	<b>3,0 kW •</b>
Spindle Rpm range	40-56-80-112-160-224-315-450-630-900-1250-1800 rpm or 28-40-56-80-112-160-224-315-450-630-900-1250 rpm or 56-80-112-160-224-315-450-630-900-1250-1800-2500 rpm	only 56-2500 rpm
Price of the machine. Distance spindle to column approx. 1000 mm	AB 30/R-1000	53.954,00 €
Price of the machine. Distance spindle to column approx. 1400 mm	AB 30/R-1400	68.351,00 €
		54.748,00 €
		68.976,00 €

• in connection with 3,0 kW motor, Pos. 42.6 is recommended

## Standard Equipment

**Electromagnetic Feed Clutch** with overload protection and cross handle switches  
**Contact Control for Clockwise Spindle Rotation** incl. motor protection circuit breaker for spindle motor and feed motor  
**Control Transformer (VDE 0113)**  
**Main switch** lockable  
**Motor isolation class „F“ (155°C)**

**Connection terminal in the electrics cabinet** (without cable)  
**Base plate with T-slots**  
**Self-Locking Mushroom Button** for EMERGENCY OFF  
**Spindle protection** electrically secured  
**Protection class IP 54**  
**Lacquer:** DD-structured signal white RAL 9003, black  
**Machine oil**

## OPTIONS

1.11	<b>Anchor and levelling elements (6 elements)</b>	870,00 €
12.2	<b>Protected tube light – LED</b>	519,00 €
20.0	<b>Tapping auto-reverse w/o foot switch</b> , max. 6 tapped holes per minute, incl. smooth-start clutch in gear box	1.714,00 €
24.	<b>Light transformer</b> , for special voltages (not necessary with 230 or 400 V with usable O-conductor and light voltage 230 V) (only with Pos. 12.2)	1.043,00 €
28.	<b>Coolant Attachment A</b> , integrated in standard base plate with overload-protected pump, backflow valve and accessories	4.150,00 €
42.6 •	<b>Electrically controlled free-cutting system</b> when depth is reached cutter remains for a controllable time in position. Incl. time-limit relay and feed brake.	3.295,00 €
47.2.1	<b>Outboard support</b> (an extra built-in switch will cut circuit to elevating motor when outboard support is locked)	409,00 €
50.6	<b>Precision depth adjuster and fixed stop</b> precision adjustment to 0,1 mm	432,00 €
53.2	<b>Portable boxed clamping table</b> , length 560 mm, width 480 mm, H 500 mm, clamping area at top 560 x 480 mm, with 3 T-slots 14 mm, at distance 150 mm / clamping area at side 560 x 330 mm, with 2 T-slots 14 mm, at distance 150 mm, weight 200 kg	3.638,00 €
54.	<b>Spindle travel 200 mm</b>	1.538,00 €
58	<b>Central clamping system</b> for sliding drill unit = mechanic, for column and arm = pneumatic/hydraulic	6.920,00 €
58.1	<b>Central clamping system</b> for sliding drill unit and arm = mechanic, for column = pneumatic	3.821,00 €
01.	<b>Special Lacquer: DD-brillant</b>	1.246,00 €
02.	<b>Special Lacquer: DD-structured</b>	585,00 €
05.	<b>Special voltages</b>	upon request
08	<b>Preservation, Transport securing, Packaging, Loading,</b> Packaging: Wooden frame, Weight: approx. 100 Kg	528,00 €

**Packing:** on wooden bars at no costs, Net weight approx. 100 kg

**MULTI-HEAD-DRILLS  
WITH FIXED HEIGHT OF TABLE RFT 20/1**

Photo with options



	Casted table <b>RFT 20/1-1</b>	Casted table <b>RFT 20/1-2</b>
Height of Table	780 mm	780 mm
Width/Depth of table with coolant channel	915 x 935 mm	915 x 1035 mm
Clamping Area at Table (width x depth)	765 x 495 mm	765 x 670 mm
Clamping Slots (number x width x distance)	3 x 14 x 112 mm	3 x 14 x 112 mm
Approximate weight w/o head	520 kg	550 kg
<b>Price of the table</b>	<b>4.773,00 €</b>	<b>5.716,00 €</b>

Assembly of heads for table	<b>RFT 20/1-1</b>		
	<b>AX 4 iTRONIC</b>	<b>AB 34 iTRONIC</b>	<b>AB 40 iTRONIC</b>
<b>Drill Head</b> , height adjustable 700 mm	<b>AX 4 iTRONIC</b>	<b>AB 34 iTRONIC</b>	<b>AB 40 iTRONIC</b>
Spindle, short	MT 4	MT 4	MT 4
Distance spindle to column *	322,5 mm	322,5 mm	322,5 mm
Distance Spindle Nose to Table max.	1034 mm	998 mm	998 mm
Distance Spindle Nose to Table min.	340 mm	304 mm	304 mm
Z-travel of spindle	140 mm	160 mm	160 mm
Weight	280 kg	285 kg	315 kg
<b>Motor</b>	<b>750/1500 rpm</b>	<b>750/1500 rpm</b>	<b>750/1500 rpm</b>
kW	1,8/2,9	1,4/2,2	1,8/2,9
Spindle Rpm range, mechanical variator	70-1200 rpm	100-1800 rpm	100-1600 rpm
<b>Price per Drill Head</b>	<b>14.527,00 €</b>	<b>14.873,00 €</b>	<b>18.006,00 €</b>

Assembly of heads for table	<b>RFT 20/1-2</b>		
	<b>AX 4 iTRONIC</b>	<b>AB 34 iTRONIC</b>	<b>AB 40 iTRONIC</b>
<b>Drill head</b> , height adjustable 490 mm * with larger distance spindle to column	<b>AX 4 iTRONIC</b>	<b>AB 34 iTRONIC</b>	<b>AB 40 iTRONIC</b>
Spindle, short	MT 4	MT 4	MT 4
Distance spindle to column *	477,5 mm	477,5 mm	477,5 mm
Distance Spindle Nose to Table max.	949 mm	913 mm	913 mm
Distance Spindle Nose to Table min.	459 mm	423 mm	423 mm
Z-travel of spindle	140 mm	160 mm	160 mm
Weight	280 kg	285 kg	315 kg
<b>Motor</b>	<b>750/1500 rpm</b>	<b>750/1500 rpm</b>	<b>750/1500 rpm</b>
kW	1,8/2,9	1,4/2,2	1,8/2,9
Spindle Rpm range, mechanical variator	70-1200 rpm	100-1800 rpm	100-1600 rpm
<b>Price per Drill Head</b>	<b>16.102,00 €</b>	<b>16.449,00 €</b>	<b>19.586,00 €</b>

**Lacquer:** DD-structured signal white RAL 9003, PANTONE 7545c, black

Standard Equipment of the drill heads and options: Please see the relevant drilling machines page.

\* Attention: Drilling capacities are different due to larger distance spindle to column

**Packing:** on wooden bars at no costs, Net weight approx. 70 kg

## MULTI-HEAD-DRILLS RFT 2 WITH FIXED HEIGHT OF TABLE

Photo with options



	Casted Table RFT 2/2	Casted Table RFT 2/3	Special Equipment
Tool Cabinet	see Pos. 09.1	see Pos. 09.1	<b>09.1 Built-in Tool Cabinet with door</b>
Height of Table	930 mm	930 mm	4 drawers (w x d x h): 3 pieces 500 x 430 x 100 mm 1 piece 500 x 430 x 150 mm door can be locked
Width of Table	900 mm	1350 mm	
Clamping Area at Table (width x depth)	750 x 330 mm	1200 x 330 mm	
Clamping Slots (number x width x distance)	2 x 12 x 224 mm	2 x 12 x 224 mm	
Approximate Weight w/o Heads	200 kg	300 kg	
Number of Drill Heads	2	3	
<b>Price of the table</b>	<b>7.194,00 €</b>	<b>8.065,00 €</b>	<b>1.169,00 €</b>

Assembly of heads for	RFT 2/2 - 2/3	
<b>Drill head, height adjustable 500 mm</b>	<b>AX 2 iTRONIC</b>	
Short spindle	MT 2	
Distance spindle to column	250 mm	
Distance Spindle Nose to Table max.	660 mm	
Distance Spindle Nose to Table min.	160 mm	
Z-travel of spindle	100 mm	
Weight	75 kg	
<b>Motor</b>	<b>750/1500 rpm</b>	<b>750/1500 rpm</b>
kW	0,6/0,95 kW	0,6/0,95 kW
Spindle Rpm range, mechanical variator	125-2400 rpm	225-4300 rpm
<b>Price per Drill Head</b>	<b>6.948,00 €</b>	<b>6.948,00 €</b>

**Lacquer:** DD-structured signal white RAL 9003, PANTONE 7545c, black

### OPTIONS

35.	<b>Coolant attachment system B</b> , with 40 l container, overload protected pump, backflow valve and complete accessories for two drill heads, with central ON/OFF switch at the electrics cabinet.	<b>1.730,00 €</b>
35.1	- for 3 Drill heads	<b>1.878,00 €</b>
01.	<b>Special Lacquer:</b> DD-brillant, table only	<b>1.529,00 €</b>
02.	<b>Special Lacquer:</b> DD-structured, table only	<b>738,00 €</b>
03.	<b>Anchoring set</b> (set of 4 pieces) up to RFT 3/3	<b>246,00 €</b>

**Packing** on wooden bars only, no costs. Net weight approx. 40-150 kg

**MULTI-HEAD-DRILLS RFT 3  
WITH FIXED HEIGHT OF TABLE**

Photo with options



	Casted table <b>RFT 3/2</b>	Casted table <b>RFT 3/3</b>	Casted table <b>RFT 3/4</b>	Casted table <b>RFT 3/5</b>	Casted table <b>RFT 3/6</b>
Height of Table (mm)	780	780	780	780	780
Width of Table (incl. channel) (mm)	1150	1650	2150	2650	3150
Clamping Area at Table (width x depth) (mm)	1000 x 350	1500 x 350	2000 x 350	2500 x 350	3000 x 350
Clamping Slots (number x width x distance) (mm)	2 x 14 x 224				
Approximate Weight w/o Heads	350 kg	520 kg	680 kg	840 kg	990 kg
Number of Drill Heads	2	3	4	5	6
<b>Price of the table</b>	<b>8.282,00 €</b>	<b>10.874,00 €</b>	<b>11.407,00 €</b>	<b>14.736,00 €</b>	<b>17.821,00 €</b>

Assembly of heads for	<b>RFT 3/2 - RFT 3/3 - RFT 3/4 - RFT 3/5 - RFT 3/6</b>	
Drill head, height adjustable 500 mm	<b>AX 3s iTRONIC</b>	<b>AX 3 iTRONIC</b>
Option 700 mm	s. Pos. 42.6	s. Pos. 42.6
Short spindle	MT 3	MT 3
Distance spindle to column	293 mm	293 mm
Distance Spindle Nose to Table max.	787 [987] mm	764 [964] mm
Distance Spindle Nose to Table min.	287 mm	264 mm
Z-travel of spindle	140 mm	120 mm
Distance spindle to spindle (fix)	500 mm	500 mm
Weight	135 kg	150 kg
<b>Motor n=750/1500 rpm</b>	<b>1,0 / 1,6 kW</b>	<b>1,0 / 1,6 kW</b>
Spindle Rpm range, mechanical variator	225-4300 rpm	80-1125 rpm
<b>Price per Drill Head</b>	<b>8.746,00 €</b>	<b>8.887,00 €</b>
<b>Motor n=750/1500 rpm</b>	<b>1,0 / 1,6 kW</b>	-
Spindle Rpm range	100-1800 rpm	-
<b>Price per Drill Head</b>	<b>9.009,00 €</b>	-
<b>Motor n=1500/3000 rpm</b>	-	<b>1,45 / 1,9 kW</b>
Spindle Rpm range, mechanical variator	-	160-2250 rpm
<b>Price per Drill Head</b>	-	<b>8.887,00 €</b>

**OPTIONS**

<b>35.</b>	<b>Coolant attachment system B</b> , with 40 l container, overload protected pump, backflow valve and complete accessories, with central ON/OFF switch at the electrics cabinet.	<b>1.730,00 €</b>
<b>35.1</b>	- for 3 Drill heads	<b>1.878,00 €</b>
<b>35.2</b>	- for 4 Drill heads	<b>2.042,00 €</b>
<b>35.3</b>	- for 5 Drill heads	<b>2.229,00 €</b>
<b>35.4</b>	- for 6 Drill heads	<b>2.414,00 €</b>
<b>42.6</b>	<b>Drill Heads 700 mm adjustable (RFT 3)</b>	<b>546,00 €</b>

Assembly of heads for	RFT 3/2 - RFT 3/3 - RFT 3/4 - RFT 3/5 - RFT 3/6		
Drill head, height adjustable 500 mm	AX 3 iTRONIC-V	AX 4 iTRONIC	
Option 700 mm	s. Pos. 42.6	s. Pos. 42.6	
Short spindle	MT 3	MT 4	
Distance spindle to column	293 mm	300 mm	
Distance Spindle Nose to Table max.	764 [964] mm	804 [1004] mm	
Distance Spindle Nose to Table min.	264 mm	304 mm	
Z-travel of spindle	120 mm	140 mm	
Distance spindle to spindle (fix)	500 mm	500 mm	
Weight	160 kg	265 kg	
<b>Motor n=1500 rpm</b>	-	<b>3 kW</b>	
Spindle Rpm range, mechanical variator	-	70-2400 rpm	
<b>Price per Drill Head</b>	-	<b>17.249,00 €</b>	
<b>Motor n=750/1500 rpm</b>	<b>1,0 / 1,6 kW</b>	<b>1,8 / 2,9 kW</b>	
Spindle Rpm range	80-1125 rpm	70-1200 rpm	
<b>Motor n=1500/3000 rpm</b>	<b>1,45 / 1,9 kW</b>	-	
Spindle Rpm range, mechanical variator	160-2250 rpm	-	
<b>Price per Drill Head</b>	<b>10.339,00 €</b>	<b>14.527,00 €</b>	

Assembly of heads for	RFT 3/2 - RFT 3/3 - RFT 3/4 - RFT 3/5 - RFT 3/6		
Drill head, height adjustable 500 mm	AB 26 iTRONIC	AB 34 iTRONIC	AB 40 iTRONIC
Option 700 mm	s. Pos. 42.6	s. Pos. 42.6	s. Pos. 42.6
Short spindle	MT 3	MT 4	MT 4
Distance spindle to column	293 mm	300 mm	300 mm
Distance Spindle Nose to Table max.	738 [938] mm	768 [968] mm	768 [968] mm
Distance Spindle Nose to Table min.	238 mm	268 mm	268 mm
Z-travel of spindle	160 mm	160 mm	160 mm
Distance spindle to spindle (fix)	500 mm	500 mm	500 mm
Weight	250 kg	270 kg	290 kg
<b>Motor n = 750/1500 rpm</b>	<b>1,0 / 1,6 kW</b>	<b>1,4 / 2,2 kW</b>	<b>1,8 / 2,9 kW</b>
Spindle Rpm range, mechanical variator	120-2200 rpm	100-1800 rpm	100-1600 rpm
<b>Price per Drill Head</b>	<b>12.500,00 €</b>	<b>14.873,00 €</b>	<b>18.006,00 €</b>
<b>Motor n = 750/1500 rpm</b>	-	-	<b>1,8 / 2,9 kW with gear</b>
Spindle Rpm range, mechanical variator	-	-	70-4000 rpm
<b>Price per Drill Head</b>	-	-	<b>19.311,00 €</b>

**Lacquer:** DD-structured signal white RAL 9003, PANTONE 7545c, black

Standard equipment of the drill heads and options: Please see the relevant drilling machines page.

01.	<b>Special Lacquer:</b> DD-brillant, table only	1.529,00 €
02.	<b>Special Lacquer:</b> DD-structured, table only	738,00 €
03.	<b>Anchoring set</b> (set of 4 pieces) up to RFT 3/3	246,00 €
03.	<b>Anchoring set</b> (set of 6 pieces) RFT 3/4 and 3/5	373,00 €
03.	<b>Anchoring set</b> (set of 8 pieces) RFT 3/6	501,00 €

**Packing** on wooden bars only, no costs. Net weight approx. 40-150 kg

## Accessories

 <p>Two-axis production table with copying device</p>	810776 *)	<b>Two-axis Production Table (sliding)</b> 760 x 425 mm, clamping area 600 x 325 mm, Height 170 mm, Travel 400 mm in X, 200 mm in Y, with adjustable end limiters, with 2 T-Slots 14 mm at distance 160 mm, max. admissible load approx. 150 kgs, max. admissible drill force 15000 N, weight approx. 140 kg	<b>7.692,00 €</b>
	816600 *)	<b>Two-axis Production Table (sliding)</b> 880 x 425 mm, clamping area 820 x 410 mm Travel 400 mm in X, 200 mm in Y, (only for AB 50 or larger). Weight approx. 190 kg	<b>8.167,00 €</b>
	37721	<b>Two-axis production table (810776) with copying device</b>	<b>9.588,00 €</b>
	37804	<b>Two-axis production table (816600) with copying device</b>	<b>10.062,00 €</b>
	37648	<b>Templates for positioning device</b> size 1 160 x 220 mm	<b>131,00 €</b>
	37630	size 2 290 x 220 mm	<b>178,00 €</b>
	37622	size 3 420 x 220 mm	<b>219,00 €</b>
	101.5	<b>Customised Hole Patterns</b> with hardened inserts A5 x 12, DIN 179, per hole	<b>60,00 €</b>
 <p>Compound table</p>	*)	<b>Compound Table</b> with drum grips for X and Y, with mm scale for X, Positioning accuracy 0.1 mm	
	810854 *)	<b>Size 200</b> cross traverse 160 mm, longitudinal traverse 240 mm Clamping area with coolant groove 430 x 240 mm, 3 T-slots Weight approx. 46 kg	<b>2.574,00 €</b>
	810856 *)	<b>Size 300</b> cross traverse 160 mm, longitudinal traverse 350 mm Clamping area with coolant groove 600 x 240 mm, 3 T-slots Weight approx. 56 kg	<b>2.880,00 €</b>
	810858 *)	<b>Size 400</b> cross traverse 240 mm, longitudinal traverse 470 mm Clamping area with coolant groove 800 x 240 mm, 3 T-slots Weight approx. 86 kg	<b>3.209,00 €</b>
	810860 *)	<b>Size 500</b> cross traverse 300 mm, longitudinal traverse 470 mm Clamping area with coolant groove 800 x 320 mm, 4 T-slots Weight approx. 122 kg	<b>4.159,00 €</b>
	836682 *)	<b>Set of Mounting Bars</b>	<b>260,00 €</b>
 <p>Vices 125/155</p>	102.5	<b>Numerical Position Display</b> for Compound Table, sizes 400 and 500 with support hook for mounting to drilling machine, display in steps of 0,005 or 0.010 mm (switchable), incl. Preset and Memofix, covered incremental scales.	<b>7.886,00 €</b>
	10660	<b>Machine Vice, size 125</b> height 85 mm, width of jaws 125 mm, clamping width 155 mm, weight 14 kgs <b>including prism jaws</b> (1 longitudinal and 2 cross prisms)	<b>894,00 €</b>
	42168	<b>Machine Vice, size 155</b> height 112 mm, width of jaws 155 mm, clamping width 230 mm, weight 29 kgs <b>including prism jaws</b> (1 longitudinal and 2 cross prisms)	<b>1.166,00 €</b>
		<b>Packing Two-axis production table, B x T x H, 1200 x 800 x 450</b>	<b>51,00 €</b>
		<b>Packing Compound table 200-500</b>	<b>51,00 €</b>
		<b>Packing Compound table 400-500, with numerical position indicator</b>	<b>100,00 €</b>

\*) Mounting possibilities to different machines to be checked! Subject to change without notice (see page 36, matrix).  
Prices are not valid for retrofitting orders and retrofitting works.

## Machine vice



Vice BON

<b>137067</b>	<b>Machine Vice Type BON with prism jaws size 1</b> height 60 mm, width of jaws 80 mm, clamping width 70 mm, weight 7,5 kg	<b>208,00 €</b>
<b>137075</b>	<b>size 2</b> height 72 mm, width of jaws 100 mm, clamping width 110 mm, weight 9,5 kg	<b>370,00 €</b>
<b>137083</b>	<b>size 3</b> height 80 mm, width of jaws 125 mm, clamping width 130 mm, weight 13,5 kg	<b>554,00 €</b>
<b>137091</b>	<b>size 4</b> height 95 mm, width of jaws 160 mm, clamping width 220 mm, weight 25 kg	<b>935,00 €</b>

## Quick action drill chucks SUPRA



<b>138107</b>	Type 136 clamping width 1-13 mm B 16	<b>113,00 €</b>
<b>140251</b>	Type 136 clamping width 3-16 mm B 16	<b>133,00 €</b>
<b>150466</b>	Type 136 clamping width 3-16 mm B 18	<b>133,00 €</b>
<b>189290</b>	Type 136 clamping width 0-10 mm B 16	<b>131,00 €</b>

Permitted for spindle Rpm range up to max. 5000 rpm.  
Not suitable for CCW rotation

## Tapers KD, DIN 238 for quick action drill chucks SUPRA



<b>138115</b>	Type 236	MT 2 B 16	<b>15,00 €</b>
<b>139048</b>	Type 236	MT 3 B 16	<b>15,00 €</b>
<b>150474</b>	Type 236	MT 3 B 18	<b>15,00 €</b>
<b>160820</b>	Type 236	MT 4 B 16	<b>19,00 €</b>
<b>320283</b>	Type 236	MT 4 B 18	<b>19,00 €</b>

## Reduction inserts RH, DIN 2185



<b>161075</b>	Type 261 N	MT 2/1	<b>20,00 €</b>
<b>190256</b>	Type 261 N	MT 3/1	<b>20,00 €</b>
<b>150482</b>	Type 261 N	MT 3/2	<b>20,00 €</b>
<b>160838</b>	Type 261 N	MT 4/1	<b>30,00 €</b>
<b>160846</b>	Type 261 N	MT 4/2	<b>30,00 €</b>
<b>160853</b>	Type 261 N	MT 4/3	<b>30,00 €</b>

## Expeller for taper DIN 228



<b>81950</b>	MT 2	<b>13,00 €</b>
<b>150490</b>	MT 3	<b>19,00 €</b>
<b>161018</b>	MT 4	<b>32,00 €</b>

## Semi-automatic expeller for morse taper DIN 228



<b>17277</b>	MT 1 - 3	<b>118,00 €</b>
<b>18952</b>	MT 4 - 6	<b>136,00 €</b>

## Special equipment

Pos.	Description		AX 2-T iTRONIC	AX 2 iTRONIC	AX 3 u. 3s iTRONIC; AX 3 iTRONIC -V	AX 4 iTRONIC	AB 26 iTRONIC	AB 34 iTRONIC-HST AB 40 iTRONIC-HST	AB 50/SV; AB 50/HST
17.	Foot Emergency-OFF Switch	EUR	234,-	234,-	234,-	234,-	234,-	234,-	234,-
21.	Control Transformer, for special voltages only	EUR	460,-	460,-	460,-	460,-	460,-	460,-#	460,-
41.	° Machined Base Plate with clamp surface 320 x 320 mm and 2 T-slots (AB50/SV = 450x460 mm)	EUR	-	665,-	665,-	665,-	665,-	665,-	-
44.0	° Combination Sq. Table (400 x 400 mm), for drilling under angles with an opposite side sliding mounted vice with clamping width 130 mm, including prism jaws, clamp surface 350 x 350 mm, Net weight increases by approx. 80 kg	EUR	-	-	2.516,-	2.516,-	2.516,-	2.516,-	2.516,-
48.5.2	Flange quill with stronger return spring for weight compensation up to 10 kg	EUR	-	-	-	-	130,-	130,-	-
01.	Special Painting DD-Brillant, (small parts DD-structured)	EUR	1.269,-	1.269,-	1.269,-	1.269,-	1.269,-	1.269,-	1.269,-
02.	Special Painting DD-structured	EUR	841,-	841,-	841,-	841,-	841,-	841,-	841,-
05.	Special voltages	upon request							

Special equipments upon request

° only for round column types

# with AB 40 standard

Prices are not valid for retrofitting orders and retrofitting works.

## Decision matrix for mounting compound tables and two-axis production table; Versions see page 42.


Size	Nr.	ALZTRONIC	ALZSTAR 18 T/S	ALZSTAR 23-T iTRONIC	ALZSTAR 23 iTRONIC	ALZSTAR 30 iTRONIC	ALZSTAR 40 iTRONIC-(V)	
200	810854	-	-	••	••	•	•	
300	810856	-	-	-	-	•	•	
400	810858	-	-	-	-	•	•	
500	810860	-	-	-	-	-	-	
Größe	Nr.	AX 2-T iTRONIC	AX 2 iTRONIC	AX 3s iTRONIC	AX 3 iTRONIC (V)	ALZFLOW 30 iTRONIC	AB 26 iTRONIC	
200	810854	••	••	•	•	•	•	
300	810856	-	-	•	•	•	•	
400	810858	-	-	•	•	•	•	
500	810860	-	-	-	-	-	-	
Größe	Nr.	AX 4 iTRONIC	AB 34 iTRONIC	AB 34 iTRONIC-HST	AB 40 (FLOW) iTRONIC	AB 40 (FLOW) iTRONIC -HST	AB 50/SV	AB 50/HST
200	810854	-	-	-	-	-	-	-
300	810856	-	-	-	-	-	-	-
400	810858	•	•	-	•	-	•	-
500	810860	-	-	•	-	•	•	•
Gleitkreuz-tisch	810776	•	•	•	•	•	•	•
Gleitkreuz-tisch	816600	-	-	•	-	•	•	•

- = mounting not possible, • = mounting possible, •• = possible only with mounting bars see Page 34, Accessories Nr. 836682.

For models with combi table 44.0, this matrix is not valid!



## Where to find us

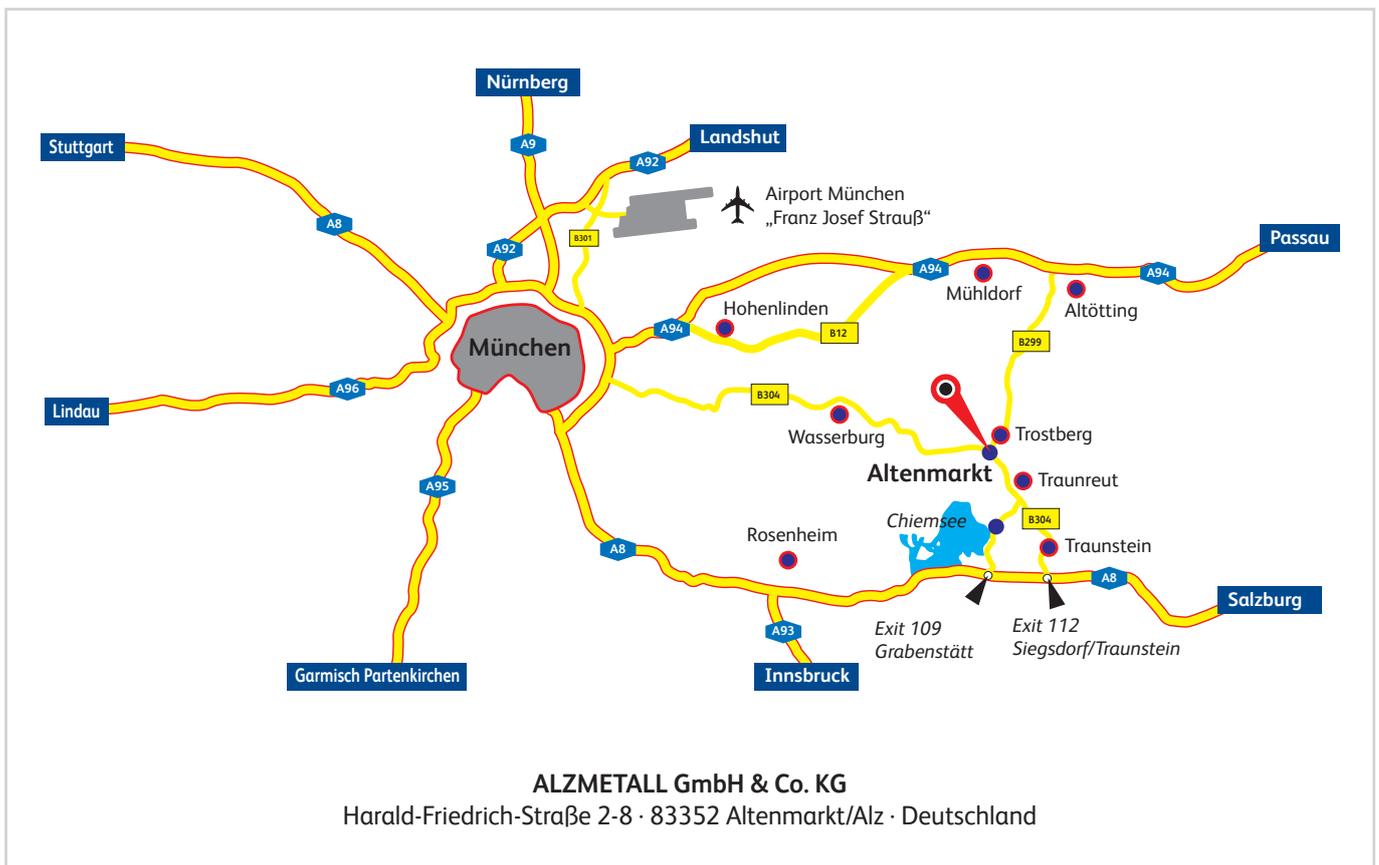

# NOTES

---

---

A large grid area for taking notes, consisting of many small squares.

# NOTES

---

---

A large grid of graph paper for taking notes, consisting of 20 columns and 30 rows of small squares.

## Short notice of our delivery terms

- Former price lists are no more valid.
- All prices are in Euro, FCA Altenmarkt/Alz , and do not include insurance, packing or any taxes and duties .
- Lacquer: DD-structured signal white RAL 9003, PANTONE 7545c, black.
- CE Norms are applied.
- Standardly equipped for 400 V, 50 Hz networks, (with ALZTRONIC for 230 V, 50 Hz).
- Every machine is delivered with : Operator's Manual , Conformity Declaration, grease and lubrication table, anchor plan
- Machines may be constructed and equipped according to customer's internal specifications. These are only upon request and do need special offers and pricings.
- For transport safety reasons ALZMETALL does not deliver machines that contain oil. Oil only in separate bins.
- Only our general conditions for the supply of machinery for national and international transactions are valid.
- Any prices are not applying to retrofit orders (accessories, options, spare/wear parts) or any assembly/modification works.

### Machining centres



GS 600

### CNC Rapid Radial Drilling Machines



Donau Werkzeugmaschinen GmbH  
83352 Altenmarkt, www.donau-wzm.de

### Machining centres



GS 600 / GS 800 / GS 1000 / GS 1200 / GS 1400

### Foundry and processing technology



ALZMETALL is operating their proper foundry at 11.000 tons per year and is a sub-contractor for many industries. Activities consist of casting, machining, lacquering.

Your dealer



**ALZMETALL GmbH & Co. KG**  
P.O. Box 1169 · 83350 Altenmarkt/Alz  
Harald-Friedrich-Straße 2-8  
83352 Altenmarkt/Alz · Deutschland  
Tel. +49 86 21 88-0 · Fax +49 86 21 88-213  
E-Mail: info@alzmetall.com · www.alzmetall.com